


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.81 lm/W			
MODEL		Imax(cd)	3847	S/MH(C0/180)	0.55
NOMINAL POWER(W)	40W	LOR(%)	100.0	S/MH(C90/270)	1.11
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	4139.8	η UP,DN(C0-180)	0.1,43.0
NOMINAL FLUX(lm)	4139.79	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,56.8
LAMPS INSIDE	1	η up(%)	0.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120.0	η down(%)	99.9	CIBSE SHR MAX	0.90

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

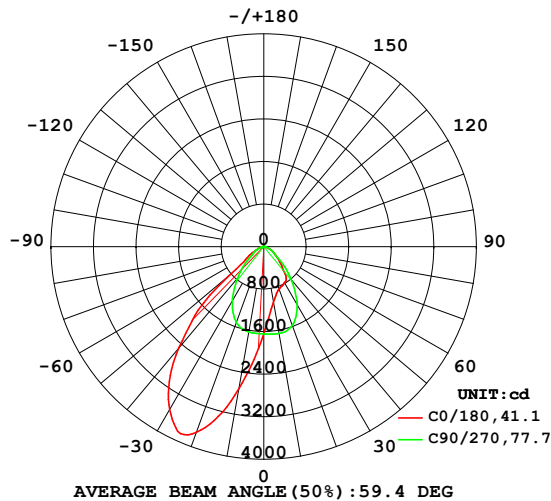

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

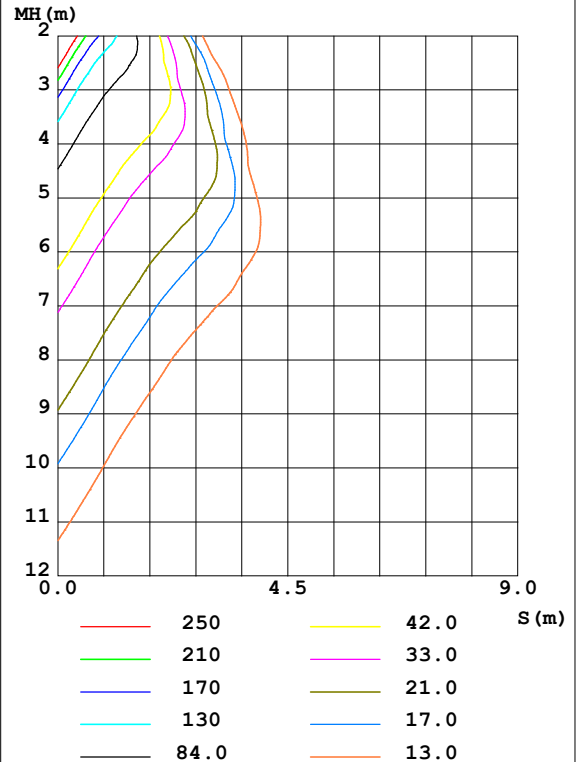

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1063	1188	1660	2377	2713	2360	1631	1198	0- 10	163.2	163.2	3.94,3.94
20	849.9	928.7	1578	3285	3717	3158	1515	957.5	10- 20	541.0	704.1	17,17
30	785.8	773.6	1256	3579	3542	3327	1186	829.6	20- 30	919.8	1624	39.2,39.2
40	561.1	626.4	802.3	2773	2480	2469	764.1	679.5	30- 40	1051	2675	64.6,64.6
50	355.3	395.9	393.1	1521	874.5	1300	386.9	395.4	40- 50	815.0	3490	84.3,84.3
60	211.3	206.6	204.7	513.2	291.3	387.8	204.5	208.3	50- 60	405.5	3895	94.1,94.1
70	94.78	95.38	100.1	123.2	105.3	100.5	96.51	90.55	60- 70	168.3	4063	98.2,98.2
80	19.46	21.39	27.10	33.62	26.46	25.38	23.88	17.10	70- 80	60.14	4124	99.6,99.6
90	0.0617	0.0705	0.4669	3.524	2.249	1.760	0.0266	0.0664	80- 90	10.20	4134	99.9,99.9
100	0.1543	0.2021	0.1331	0.1276	0.0785	0.0915	0.0631	0.1402	90-100	0.2201	4134	99.9,99.9
110	0.4507	0.6508	0.3121	0.2502	0.1474	0.1572	0.1843	0.4283	100-110	0.2188	4134	99.9,99.9
120	1.320	1.355	0.6439	0.4390	0.2710	0.2816	0.4291	0.9639	110-120	0.5032	4135	99.9,99.9
130	2.277	2.156	1.123	0.6611	0.4468	0.4577	0.8240	1.622	120-130	0.8492	4136	99.9,99.9
140	3.028	2.780	1.673	0.9443	0.6156	0.6759	1.289	2.263	130-140	1.104	4137	99.9,99.9
150	3.226	3.123	2.187	1.304	0.8676	1.037	1.851	3.092	140-150	1.169	4138	100,100
160	3.036	3.214	2.560	1.825	1.260	1.488	2.377	3.643	150-160	1.039	4139	100,100
170	2.756	3.021	2.775	2.504	1.690	2.012	2.749	3.730	160-170	0.7184	4140	100,100
180	2.183	2.533	2.851	3.200	2.193	2.538	2.856	3.189	170-180	0.2557	4140	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

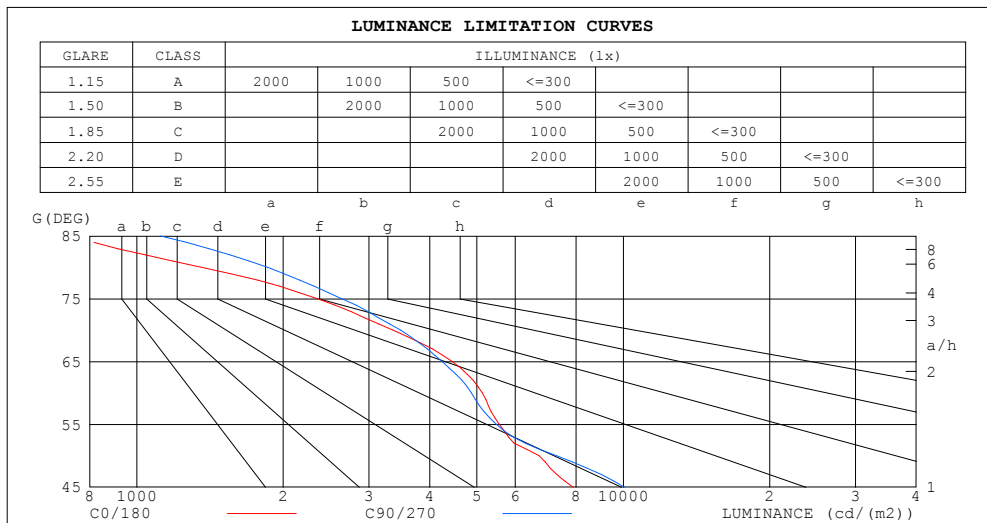


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.02	1.06	1.03	.00	1.01	.99	.97	.98	.96	.94	.94	.93	.91	.89
2.0	.97	.92	.87	.95	.90	.86	.92	.88	.84	.89	.85	.82	.86	.83	.81	.79
3.0	.88	.81	.76	.86	.80	.75	.83	.78	.74	.81	.76	.72	.78	.74	.71	.69
4.0	.79	.72	.66	.78	.71	.66	.76	.70	.65	.73	.68	.64	.71	.67	.63	.61
5.0	.72	.64	.59	.71	.64	.58	.69	.62	.58	.67	.61	.57	.65	.60	.56	.55
6.0	.65	.58	.52	.65	.57	.52	.63	.56	.51	.61	.55	.51	.60	.55	.51	.49
7.0	.60	.52	.47	.59	.52	.47	.58	.51	.46	.56	.50	.46	.55	.50	.46	.44
8.0	.55	.47	.42	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.45	.41	.40
9.0	.51	.43	.38	.50	.43	.38	.49	.43	.38	.48	.42	.38	.47	.42	.38	.36
10.0	.47	.40	.35	.46	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33

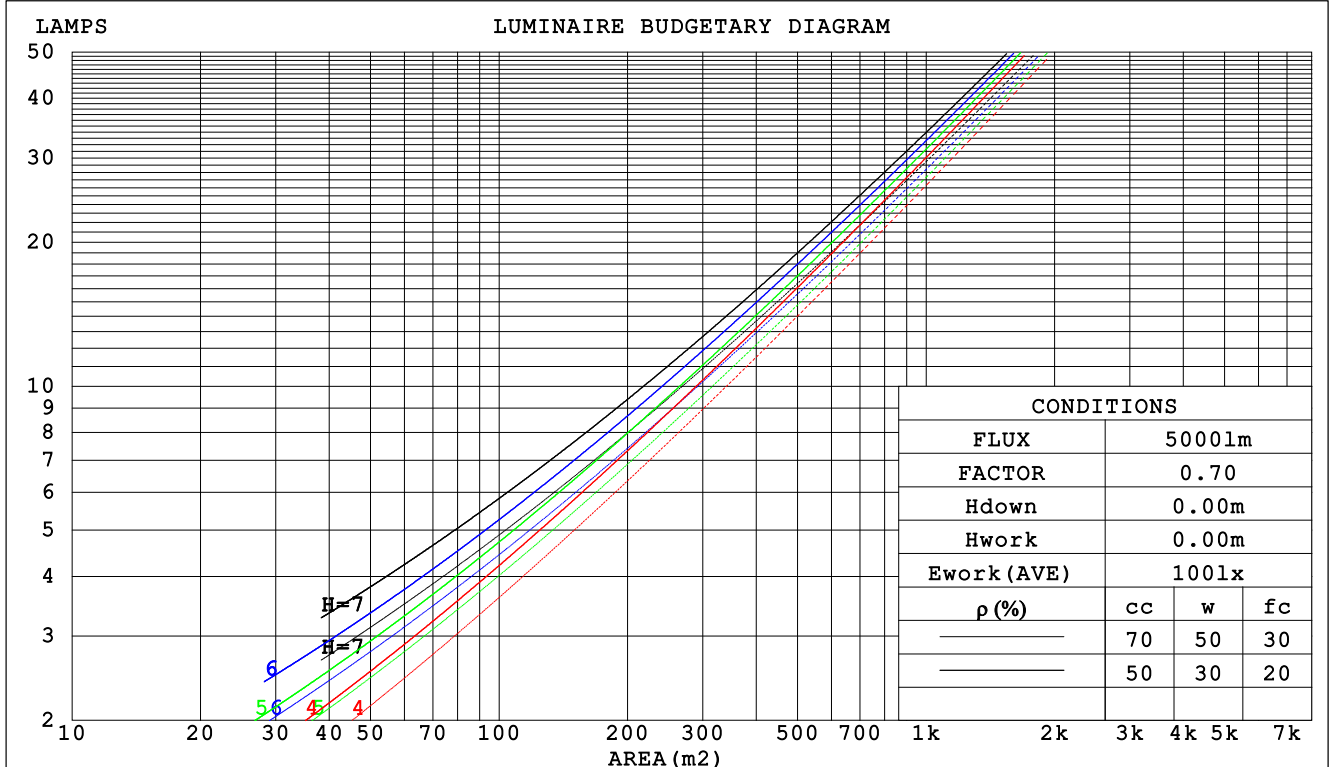

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm					
NAME: 4FT 偏光			TYPE:4000K		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: EVERFINE			SUR.:		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.234	.133	.042	.227	.129	.041	.214	.123	.039	.202	.116	.037	.191	.111	.036		
2.0	.228	.125	.038	.222	.122	.038	.211	.117	.036	.200	.112	.035	.191	.108	.034		
3.0	.217	.116	.035	.212	.114	.034	.202	.110	.033	.193	.106	.033	.185	.102	.032		
4.0	.206	.107	.031	.202	.106	.031	.193	.102	.031	.185	.099	.030	.178	.096	.029		
5.0	.195	.099	.029	.191	.098	.029	.183	.095	.028	.176	.093	.028	.170	.091	.027		
6.0	.184	.092	.026	.181	.091	.026	.174	.089	.026	.168	.087	.026	.162	.085	.025		
7.0	.175	.086	.024	.171	.085	.024	.165	.084	.024	.160	.082	.024	.154	.080	.024		
8.0	.165	.081	.023	.163	.080	.023	.157	.078	.022	.152	.077	.022	.147	.076	.022		
9.0	.157	.076	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	.140	.071	.021		
10.0	.149	.072	.020	.147	.071	.020	.142	.070	.020	.138	.069	.019	.134	.067	.019		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.176	.158	.142	.151	.136	.122	.103	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.165	.133	.107	.141	.115	.092	.097	.079	.064	.056	.046	.038	.018	.015	.012	
3.0	.155	.115	.083	.133	.099	.072	.092	.069	.050	.053	.040	.030	.017	.013	.010	
4.0	.147	.101	.066	.126	.087	.057	.087	.061	.040	.050	.036	.024	.016	.012	.008	
5.0	.140	.090	.054	.120	.078	.047	.083	.055	.033	.048	.032	.020	.015	.010	.006	
6.0	.134	.082	.044	.115	.071	.039	.079	.050	.027	.046	.029	.016	.015	.010	.005	
7.0	.127	.075	.038	.110	.065	.033	.076	.045	.023	.044	.027	.014	.014	.009	.005	
8.0	.122	.069	.032	.105	.060	.028	.073	.042	.020	.042	.025	.012	.014	.008	.004	
9.0	.116	.064	.028	.100	.055	.025	.070	.039	.018	.040	.023	.010	.013	.008	.003	
10.0	.112	.060	.025	.096	.052	.022	.067	.036	.016	.039	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm										
NAME: 4FT 偏光					TYPE:4000K			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.2	17.5	16.4	17.7	17.9	16.6	17.9	16.8	18.0	18.2
3H	16.9	18.0	17.1	18.3	18.5	17.2	18.3	17.4	18.6	18.8
4H	17.0	18.1	17.3	18.3	18.6	17.3	18.4	17.6	18.7	18.9
6H	17.0	18.0	17.3	18.3	18.6	17.3	18.4	17.7	18.6	18.9
8H	17.0	18.0	17.3	18.2	18.5	17.3	18.3	17.7	18.6	18.9
12H	16.9	17.9	17.3	18.2	18.5	17.3	18.3	17.6	18.5	18.8
4H 2H	16.5	17.6	16.8	17.8	18.1	16.8	17.9	17.1	18.2	18.4
3H	17.3	18.2	17.6	18.5	18.8	17.5	18.5	17.9	18.8	19.1
4H	17.5	18.3	17.8	18.7	19.0	17.7	18.6	18.1	18.9	19.2
6H	17.5	18.3	17.9	18.6	19.0	17.8	18.6	18.2	18.9	19.3
8H	17.5	18.2	17.9	18.6	19.0	17.8	18.5	18.3	18.9	19.3
12H	17.5	18.1	17.9	18.5	18.9	17.8	18.5	18.3	18.8	19.2
8H 4H	17.5	18.2	17.9	18.6	18.9	17.8	18.5	18.2	18.8	19.2
6H	17.6	18.2	18.0	18.6	19.0	17.9	18.5	18.3	18.9	19.3
8H	17.6	18.1	18.0	18.5	19.0	17.9	18.4	18.4	18.8	19.3
12H	17.6	18.0	18.0	18.4	18.9	17.9	18.3	18.4	18.8	19.3
12H 4H	17.5	18.1	17.9	18.5	18.9	17.7	18.4	18.1	18.7	19.1
6H	17.6	18.1	18.0	18.5	18.9	17.9	18.4	18.3	18.8	19.2
8H	17.6	18.0	18.0	18.4	18.9	17.9	18.3	18.4	18.8	19.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.8					+ 0.7 / - 1.0				
1.5H	+ 0.3 / - 0.8					+ 0.9 / - 0.8				
2.0H	+ 1.1 / - 0.8					+ 1.8 / - 1.0				

CIE Pub.117 Corrected 4140 lm Total Lamp Luminous Flux.(8log(F/F0) = 4.9)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	59	54	68	59	54	67	59	53	48
0.80	79	70	64	78	69	64	77	69	63	58
1.00	87	78	73	86	78	72	84	78	72	66
1.25	93	85	80	92	84	79	89	83	79	73
1.50	97	90	85	96	89	84	93	87	83	77
2.00	102	96	91	101	95	91	98	93	89	83
2.50	105	99	95	103	98	94	100	95	92	85
3.00	107	102	98	105	101	97	102	98	95	88
4.00	110	106	103	108	104	101	104	101	99	91
5.00	112	108	105	110	106	104	105	103	101	92
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

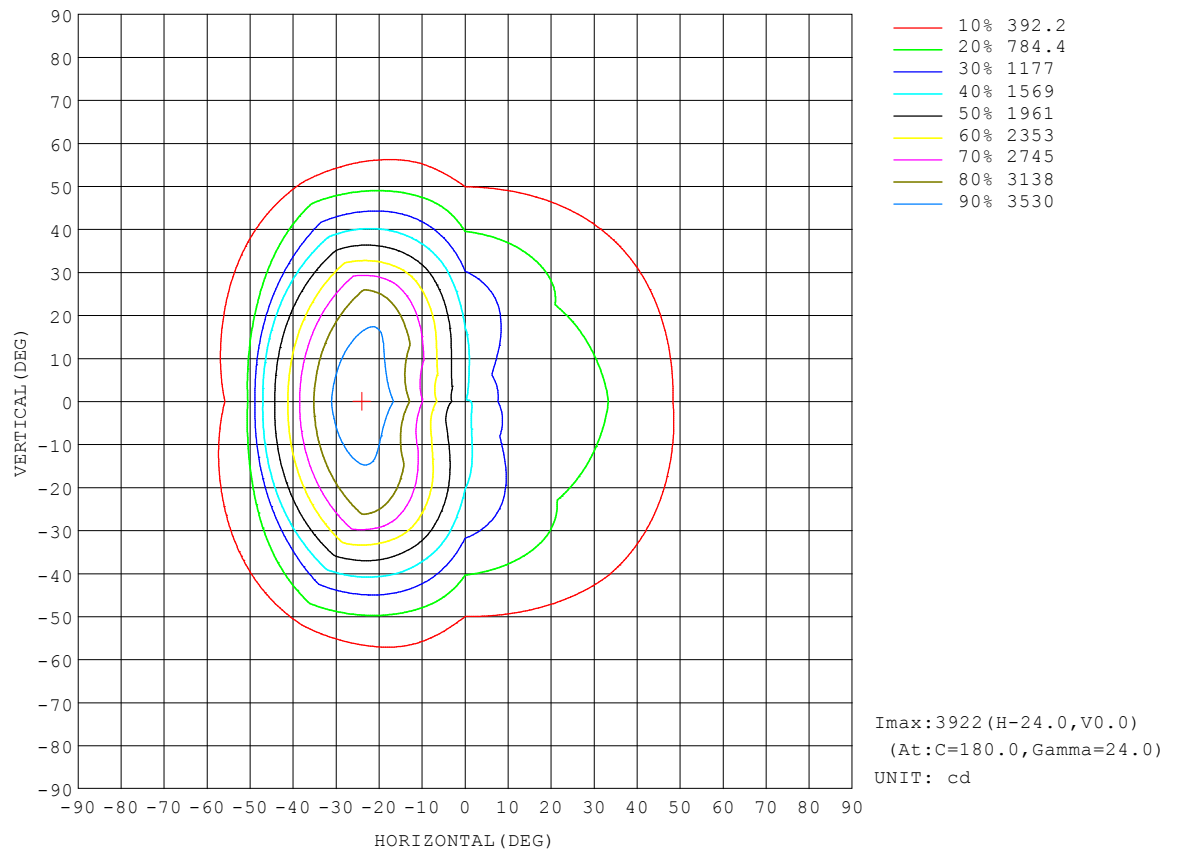


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

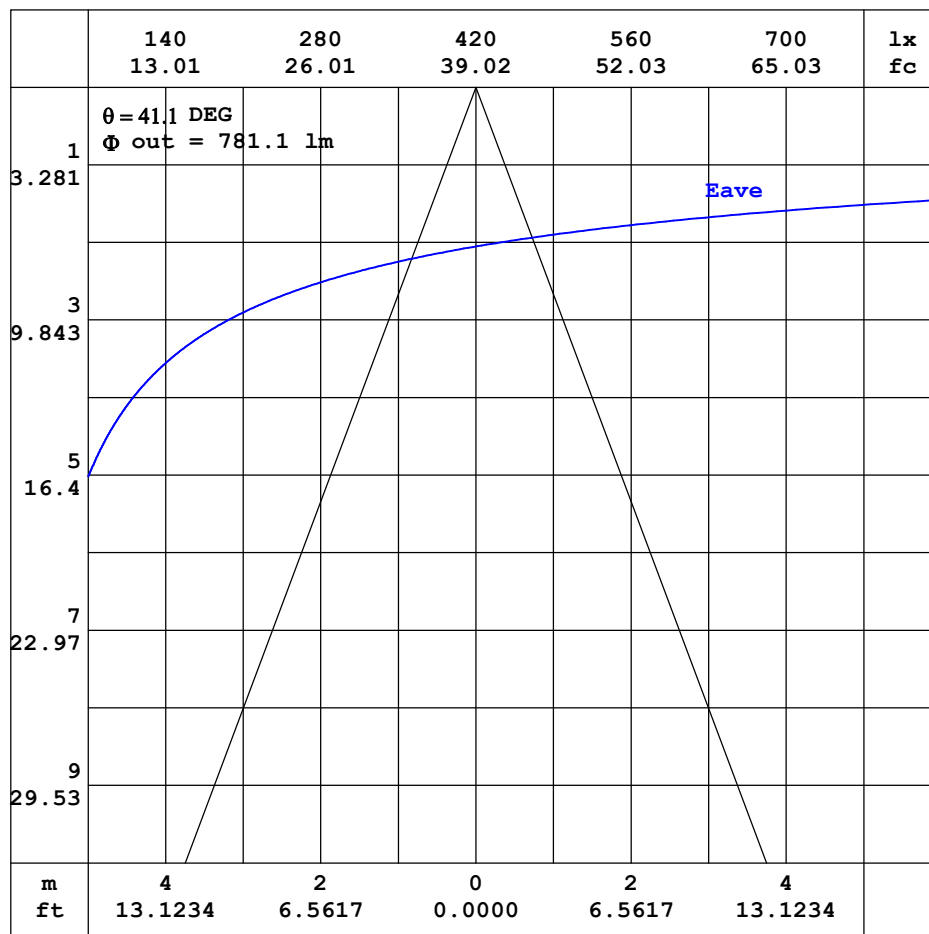


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

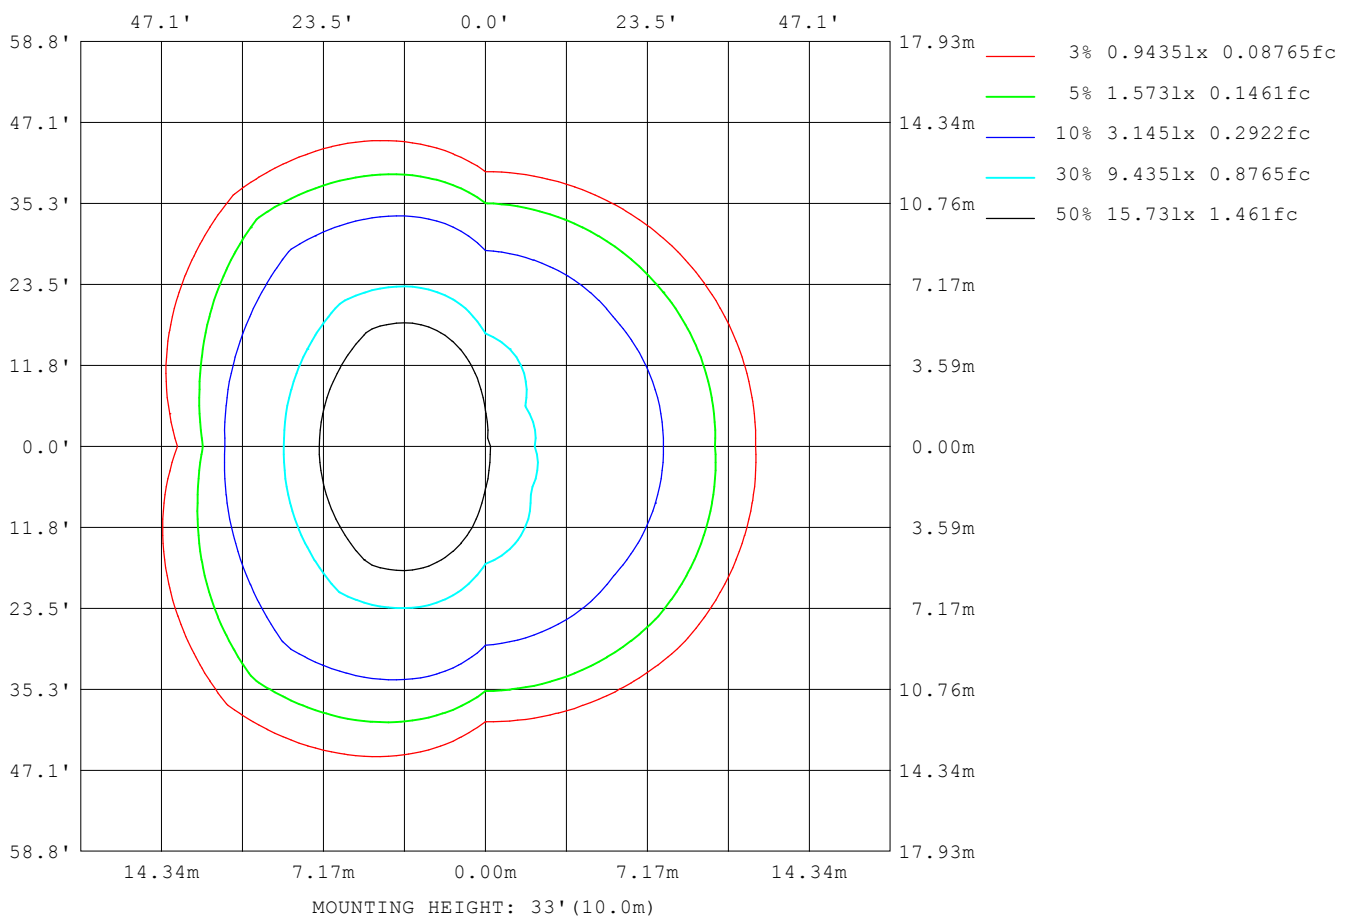

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	4494
L_0~180 (75) av	2409
L_0~180 (85) av	1051
L_90~270 (65) av	4215
L_90~270 (75) av	2537
L_90~270 (85) av	985
L_45 (65) av	4837
L_45 (75) av	2539
L_45 (85) av	1117

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-01-02

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

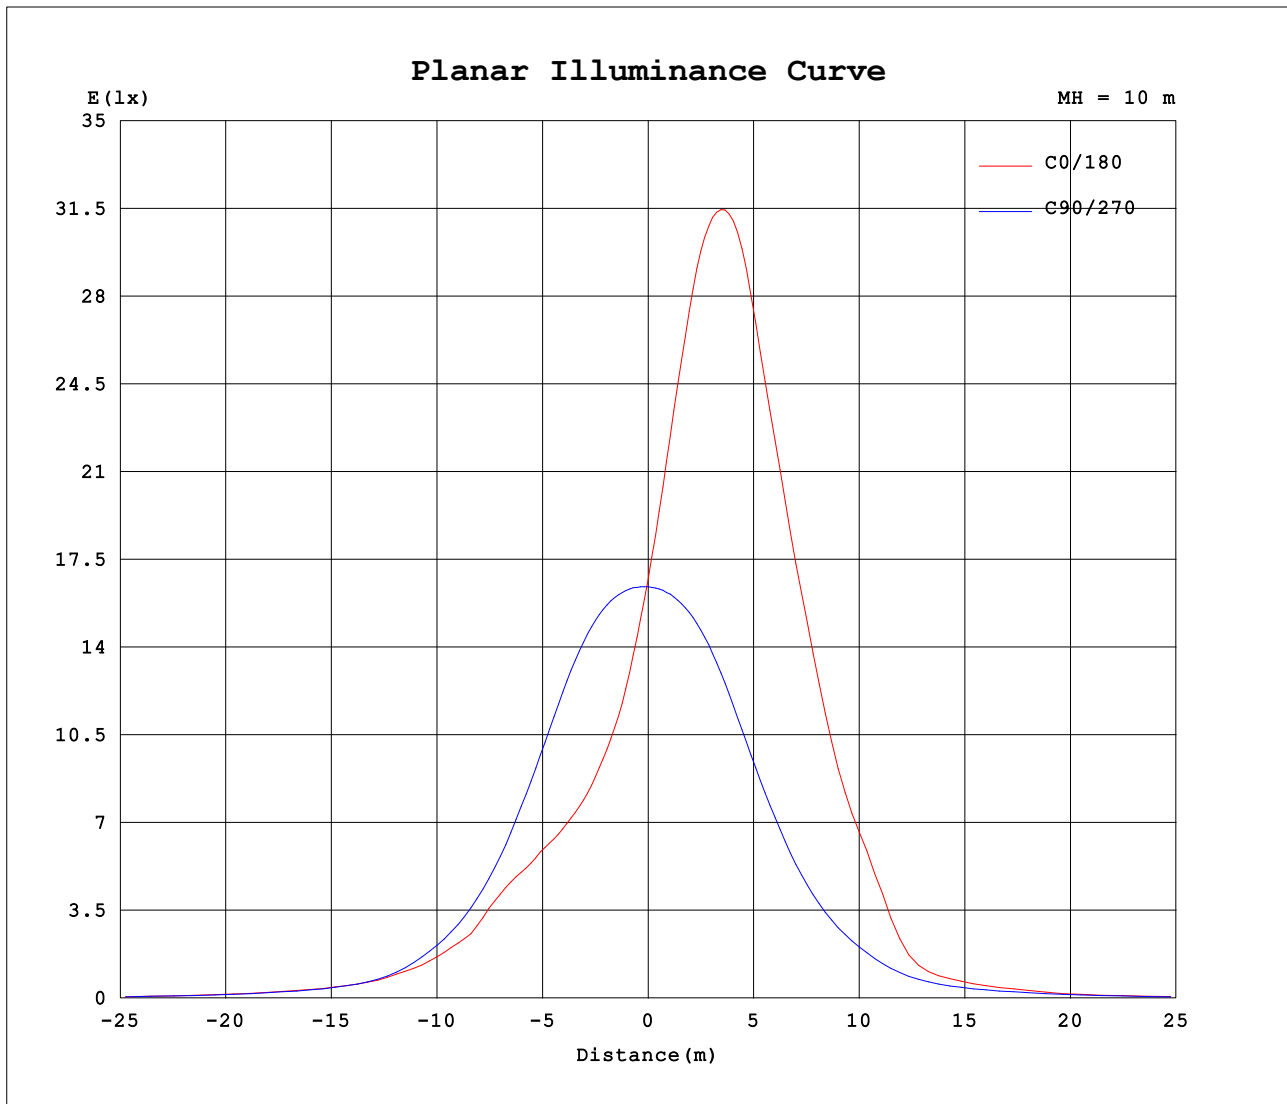

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.3200A P:38.40W PF:0.9960 Freq:60.00Hz Lamp Flux:4139.79x1 lm		
NAME: 4FT 偏光	TYPE:4000K	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1642	1642	1642	1642	1642	1642	1642	1642										
5	1291	1387	1651	1963	2125	1962	1638	1389										
10	1063	1188	1660	2377	2713	2360	1631	1198										
15	924	1043	1644	2839	3303	2788	1599	1065										
20	850	929	1578	3285	3717	3158	1515	957										
25	817	840	1444	3549	3830	3352	1371	889										
30	786	774	1256	3579	3542	3327	1186	830										
35	741	710	1030	3304	3096	2995	972	763										
40	561	626	802	2773	2480	2469	764	679										
45	459	531	597	2149	1842	1887	579	547										
50	355	396	393	1521	874	1300	387	395										
55	263	288	264	959	406	807	264	289										
60	211	207	205	513	291	388	204	208										
65	155	148	151	214	164	176	149	149										
70	94.8	95.4	100	123	105	100	96.5	90.6										
75	50.1	50.8	57.4	69.7	54.6	55.0	52.9	45.3										
80	19.5	21.4	27.1	33.6	26.5	25.4	23.9	17.1										
85	5.29	5.89	8.20	13.4	10.1	9.11	6.23	4.28										
90	0.06	0.07	0.47	3.52	2.25	1.76	0.03	0.07										
95	0.09	0.11	0.08	0.09	0.06	0.08	0.04	0.09										
100	0.15	0.20	0.13	0.13	0.08	0.09	0.06	0.14										
105	0.24	0.37	0.20	0.18	0.11	0.11	0.12	0.26										
110	0.45	0.65	0.31	0.25	0.15	0.16	0.18	0.43										
115	0.88	0.97	0.46	0.35	0.20	0.21	0.29	0.68										
120	1.32	1.36	0.64	0.44	0.27	0.28	0.43	0.96										
125	1.79	1.75	0.88	0.54	0.36	0.36	0.61	1.28										
130	2.28	2.16	1.12	0.66	0.45	0.46	0.82	1.62										
135	2.70	2.50	1.39	0.79	0.53	0.57	1.05	1.92										
140	3.03	2.78	1.67	0.94	0.62	0.68	1.29	2.26										
145	3.19	2.99	1.93	1.09	0.72	0.82	1.56	2.61										
150	3.23	3.12	2.19	1.30	0.87	1.04	1.85	3.09										
155	3.16	3.19	2.37	1.54	1.04	1.26	2.12	3.41										
160	3.04	3.21	2.56	1.82	1.26	1.49	2.38	3.64										
165	2.92	3.17	2.67	2.15	1.48	1.74	2.60	3.76										
170	2.76	3.02	2.78	2.50	1.69	2.01	2.75	3.73										
175	2.52	2.83	2.86	2.88	1.92	2.27	2.84	3.52										
180	2.18	2.53	2.85	3.20	2.19	2.54	2.86	3.19										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-01-02

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: