


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.38 lm/W			
MODEL		I _{max} (cd)	9620	S/MH(C0/180)	0.53
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.27
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	731.92	η UP,DN(C0-180)	0.2,56.2
NOMINAL FLUX(lm)	731.922	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,43.5
LAMPS INSIDE	1	η up(%)	0.3	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.7	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

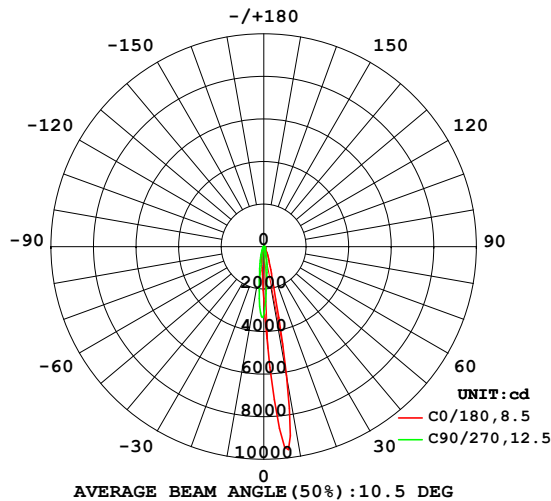

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

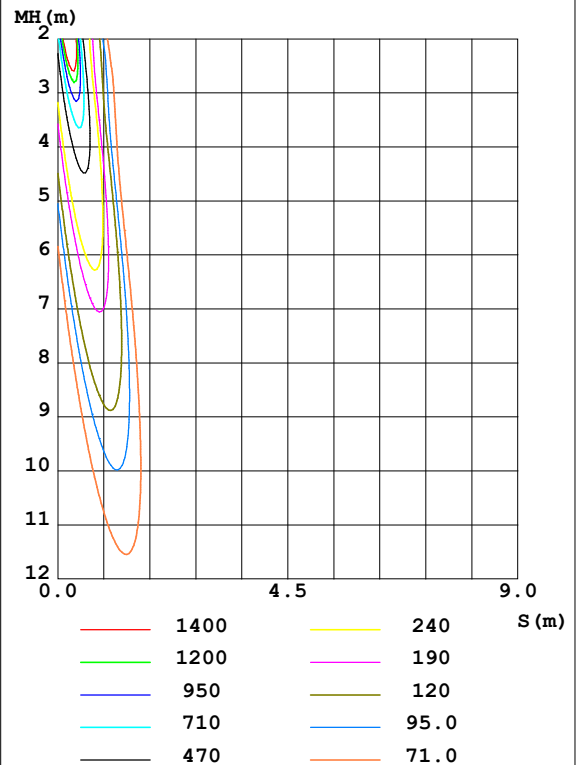

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	6158	1619	866.8	689.9	552.7	693.1	1173	3323	0- 10	283.3	283.3	38.7,38.7
20	776.3	492.9	281.0	207.3	164.4	208.6	372.1	593.0	10- 20	220.6	503.9	68.8,68.8
30	227.4	155.6	102.6	80.16	67.55	81.82	120.4	170.0	20- 30	103.1	607.0	82.9,82.9
40	81.15	65.13	48.48	39.07	36.81	40.73	55.57	69.98	30- 40	50.97	658.0	89.9,89.9
50	43.79	35.02	27.96	22.78	21.46	24.06	31.77	36.07	40- 50	31.35	689.3	94.2,94.2
60	25.22	21.20	16.24	12.85	11.75	13.60	18.65	21.45	50- 60	20.91	710.2	97,97
70	14.98	11.23	7.627	4.746	3.666	5.179	9.498	11.65	60- 70	12.78	723.0	98.8,98.8
80	6.255	3.807	1.583	0.8804	0.6426	0.8975	2.509	4.117	70- 80	5.539	728.6	99.5,99.5
90	1.261	0.6163	0.0048	0.0847	0.1332	0.0799	0	0.7157	80- 90	1.242	729.8	99.7,99.7
100	0.1018	0.1016	0.0192	0.0823	0.1643	0.1040	0	0.0847	90-100	0.1732	730.0	99.7,99.7
110	0.1356	0.0898	0.0291	0.1113	0.1405	0.0871	0.0049	0.0800	100-110	0.0861	730.1	99.7,99.7
120	0.1500	0.1211	0.0677	0.2713	0.3173	0.2180	0.0121	0.0944	110-120	0.1143	730.2	99.8,99.8
130	0.2590	0.2883	0.1208	0.3269	0.3165	0.2106	0.0291	0.2276	120-130	0.1652	730.3	99.8,99.8
140	0.4382	0.3754	0.2709	0.5017	0.3270	0.2227	0.0776	0.2542	130-140	0.2027	730.6	99.8,99.8
150	0.6100	0.6228	0.7622	1.414	0.7106	0.4235	0.2230	0.3002	140-150	0.2684	730.8	99.8,99.8
160	1.231	1.712	2.703	3.492	1.000	0.8667	0.6545	0.6051	150-160	0.4936	731.3	99.9,99.9
170	4.132	2.758	1.532	1.293	0.9906	0.8670	0.9011	0.9759	160-170	0.4760	731.8	100,100
180	1.468	1.141	0.8985	0.9663	1.472	1.138	0.9033	0.9590	170-180	0.1327	731.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

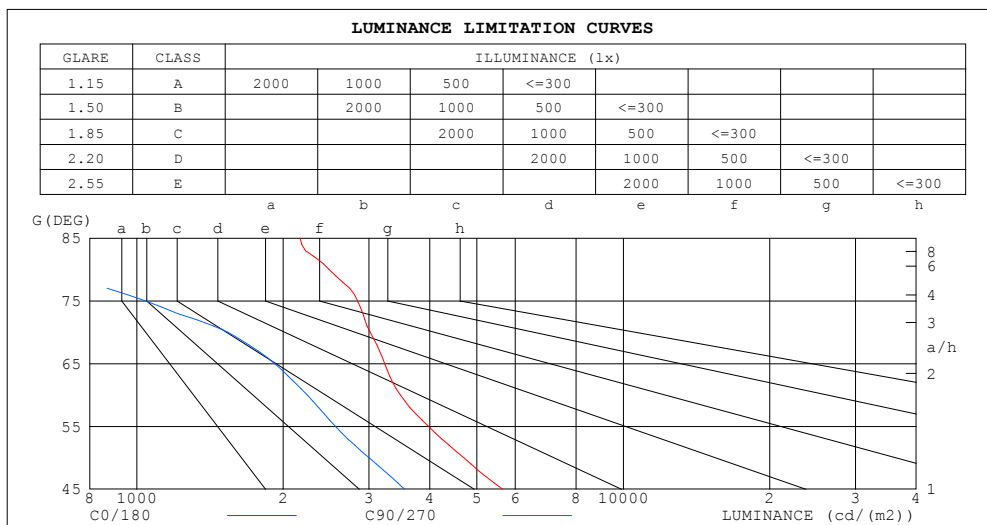

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2167	371
80	2484	629
75	2840	1038
70	3020	1538
65	3234	1920
60	3479	2240
55	3979	2561
50	4699	3000
45	5648	3552


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.98	.97	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.90	.94	.91	.89	.92	.89	.88	.86
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.86	.83	.81	.79
6.0	.88	.83	.80	.87	.83	.79	.86	.82	.79	.84	.81	.78	.83	.80	.78	.77
7.0	.85	.80	.77	.84	.80	.77	.83	.79	.76	.82	.78	.76	.81	.78	.75	.74
8.0	.82	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.79	.75	.73	.72
9.0	.79	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70
10.0	.77	.73	.70	.77	.72	.70	.76	.72	.69	.75	.72	.69	.75	.71	.69	.68

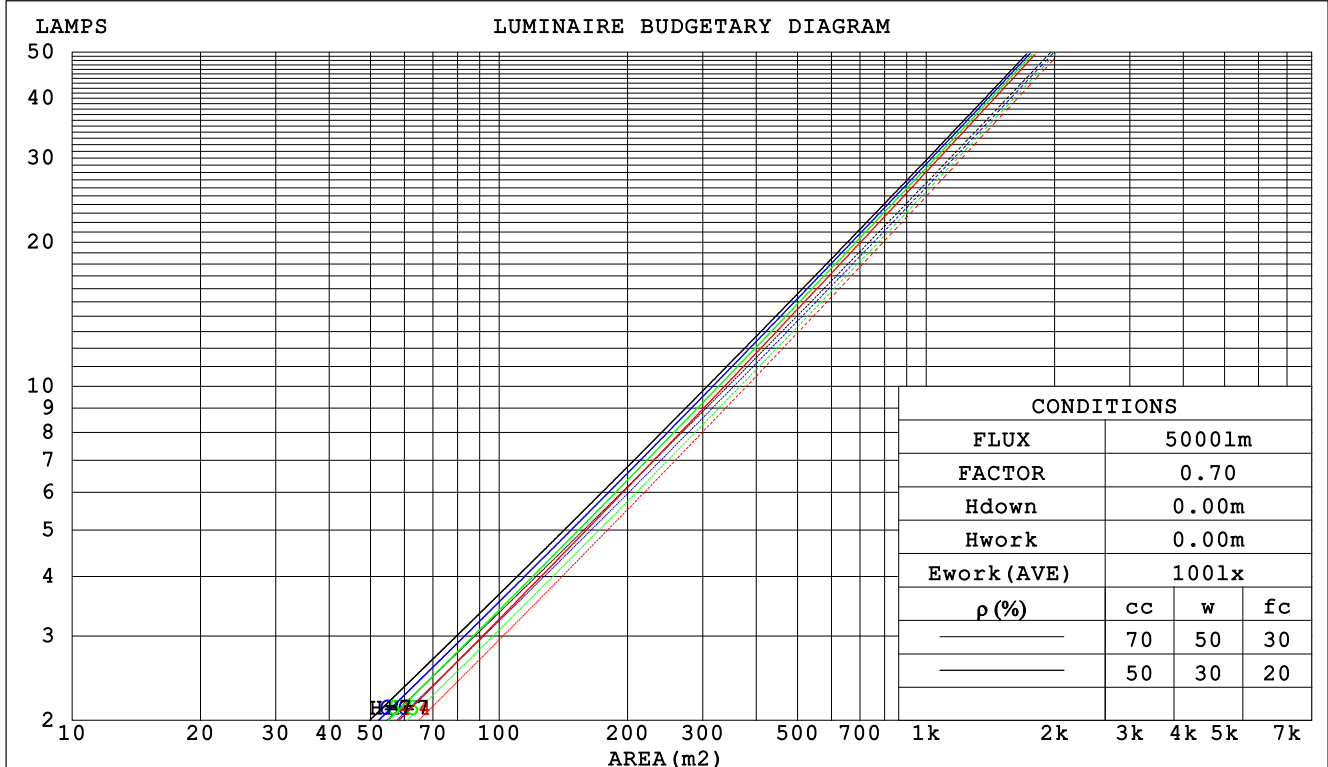

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm					
NAME: WL-3COVE1FT10WAD1UV-1010-GR			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 1FT		SERIAL No.:
MFR.: WS			SUR.:0.29*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.157	.089	.028	.150	.085	.027	.137	.079	.025	.126	.072	.023	.115	.067	.021		
2.0	.146	.080	.025	.141	.078	.024	.130	.072	.023	.121	.068	.021	.112	.063	.020		
3.0	.136	.073	.022	.132	.071	.021	.123	.067	.020	.115	.063	.019	.107	.059	.018		
4.0	.127	.066	.019	.123	.065	.019	.116	.061	.018	.109	.058	.018	.102	.056	.017		
5.0	.119	.061	.018	.116	.060	.017	.110	.057	.017	.103	.055	.016	.098	.052	.016		
6.0	.112	.056	.016	.109	.055	.016	.104	.053	.015	.098	.051	.015	.094	.049	.015		
7.0	.106	.052	.015	.103	.052	.015	.098	.050	.014	.094	.048	.014	.090	.047	.014		
8.0	.100	.049	.014	.098	.048	.014	.094	.047	.013	.090	.045	.013	.086	.044	.013		
9.0	.095	.046	.013	.093	.045	.013	.089	.044	.013	.086	.043	.012	.082	.042	.012		
10.0	.091	.043	.012	.089	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.172	.160	.149	.147	.137	.128	.101	.094	.089	.058	.055	.051	.019	.018	.017	
2.0	.155	.135	.118	.133	.116	.102	.091	.080	.071	.052	.047	.042	.017	.015	.014	
3.0	.141	.116	.095	.121	.100	.083	.083	.069	.058	.048	.040	.034	.015	.013	.011	
4.0	.129	.101	.079	.111	.087	.068	.076	.061	.048	.044	.035	.028	.014	.012	.009	
5.0	.119	.088	.066	.102	.077	.057	.070	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.110	.079	.056	.095	.068	.049	.065	.048	.034	.038	.028	.021	.012	.009	.007	
7.0	.103	.071	.048	.088	.061	.042	.061	.043	.030	.035	.025	.018	.011	.008	.006	
8.0	.096	.064	.042	.083	.055	.037	.057	.039	.026	.033	.023	.015	.011	.008	.005	
9.0	.090	.058	.037	.078	.051	.032	.054	.036	.023	.031	.021	.014	.010	.007	.005	
10.0	.085	.054	.033	.073	.047	.028	.051	.033	.020	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm										
NAME: WL-3COVE1FT10WAD1UV-1010-GR					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 1FT			SERIAL No.:		
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.4	14.1	13.6	14.3	14.5	11.5	12.2	11.7	12.4	12.5
3H	14.4	15.1	14.6	15.3	15.5	12.1	12.8	12.4	13.0	13.2
4H	14.8	15.5	15.1	15.7	15.9	12.3	12.9	12.5	13.2	13.4
6H	15.1	15.8	15.4	16.0	16.2	12.3	12.9	12.6	13.2	13.4
8H	15.2	15.8	15.5	16.1	16.3	12.3	12.9	12.6	13.1	13.4
12H	15.3	15.9	15.6	16.1	16.4	12.2	12.8	12.6	13.1	13.4
4H 2H	13.6	14.3	13.9	14.5	14.7	12.0	12.7	12.3	12.9	13.1
3H	14.8	15.3	15.1	15.6	15.9	12.8	13.4	13.1	13.7	14.0
4H	15.3	15.8	15.6	16.1	16.4	13.1	13.6	13.4	13.9	14.2
6H	15.7	16.2	16.1	16.5	16.9	13.1	13.6	13.5	13.9	14.3
8H	15.9	16.3	16.2	16.7	17.0	13.1	13.6	13.5	13.9	14.3
12H	15.9	16.3	16.3	16.7	17.1	13.1	13.5	13.5	13.9	14.2
8H 4H	15.3	15.8	15.7	16.1	16.5	13.3	13.7	13.6	14.0	14.4
6H	15.8	16.2	16.3	16.6	17.0	13.4	13.8	13.8	14.2	14.6
8H	16.0	16.3	16.5	16.8	17.2	13.4	13.7	13.9	14.1	14.6
12H	16.1	16.4	16.6	16.9	17.3	13.4	13.7	13.9	14.1	14.6
12H 4H	15.3	15.7	15.7	16.1	16.5	13.3	13.7	13.7	14.0	14.4
6H	15.8	16.1	16.3	16.5	17.0	13.4	13.7	13.9	14.2	14.6
8H	16.0	16.3	16.5	16.7	17.2	13.4	13.7	13.9	14.2	14.6
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.8				
1.5H	+ 0.9 / - 0.5					+ 0.5 / - 0.7				
2.0H	+ 1.0 / - 0.7					+ 0.7 / - 1.0				

CIE Pub.117 Corrected 731.9 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	78	74	84	78	74	71
0.80	93	87	83	92	86	82	91	86	82	78
1.00	97	92	88	97	91	87	95	91	87	83
1.25	102	96	92	101	96	92	99	94	91	87
1.50	105	99	96	103	99	95	101	97	94	90
2.00	107	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	102	99	93
3.00	111	107	104	109	106	103	106	103	101	95
4.00	113	110	108	111	109	106	107	105	104	96
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

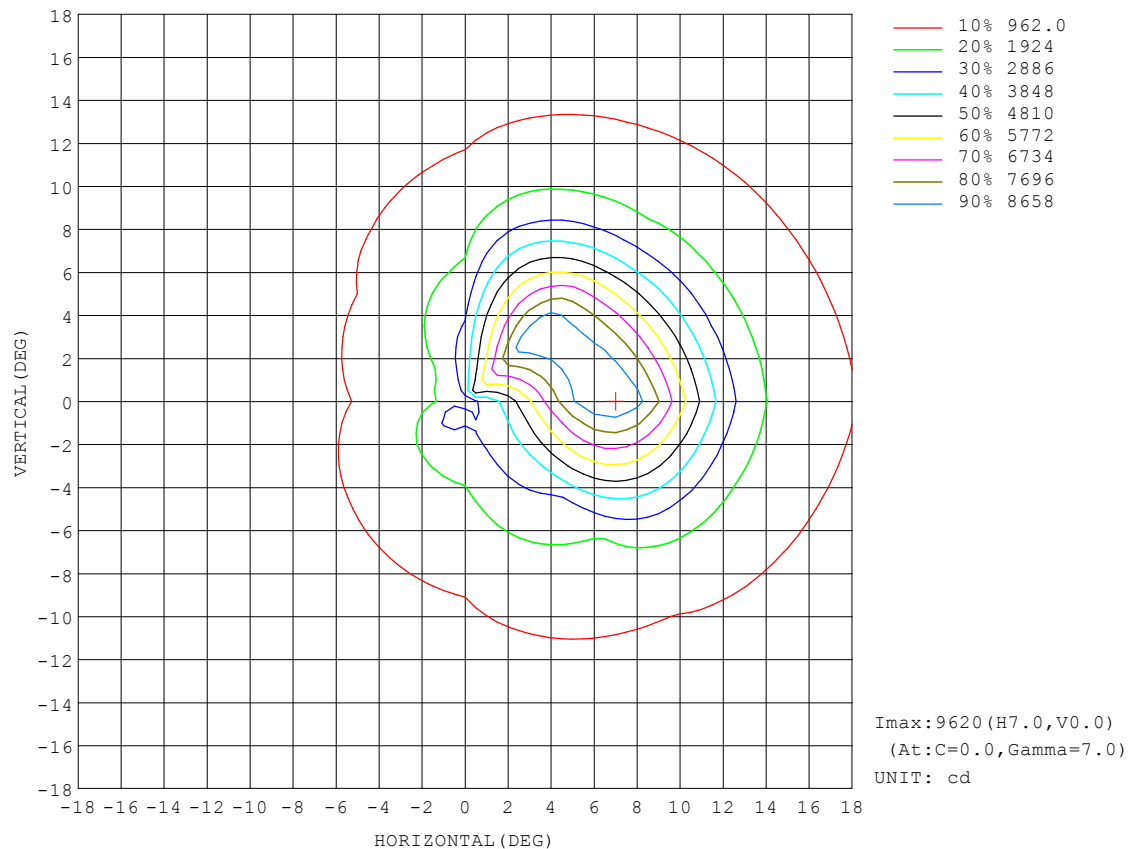


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

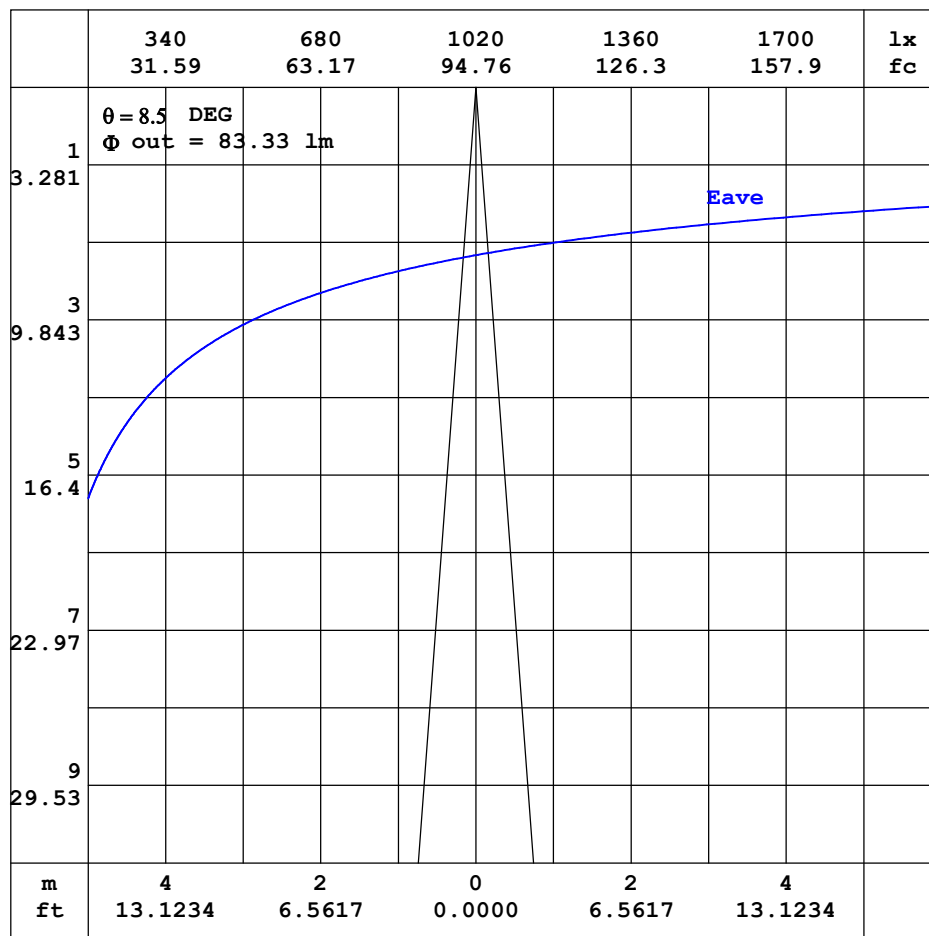


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

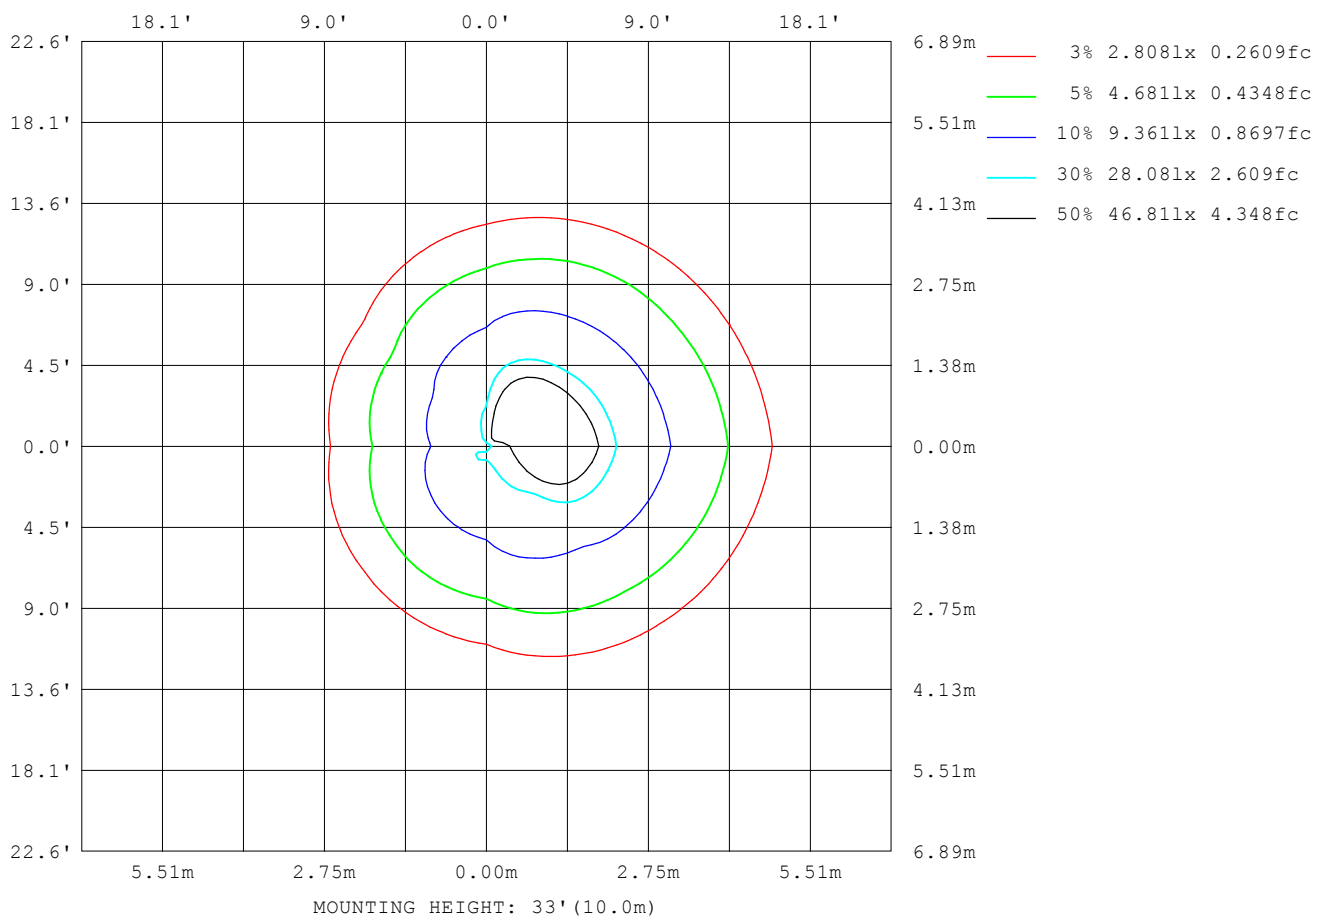

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2207
L_0~180 (75) av	1617
L_0~180 (85) av	1130
L_90~270 (65) av	2094
L_90~270 (75) av	1225
L_90~270 (85) av	499
L_45 (65) av	2049
L_45 (75) av	1283
L_45 (85) av	699

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

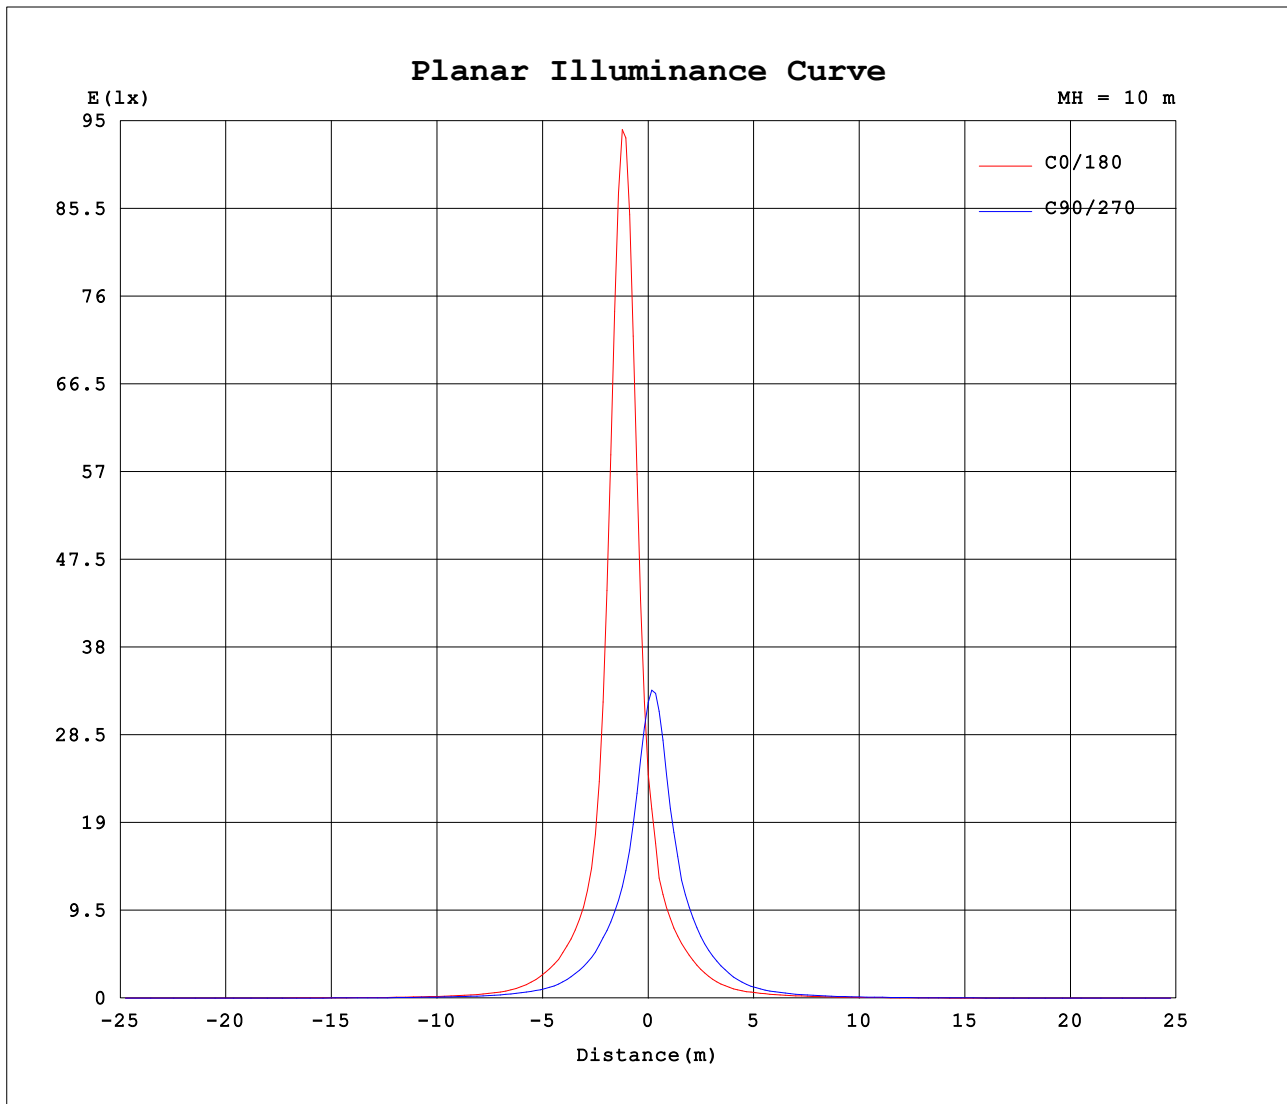

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0870A P:10.40W PF:0.9950 Freq:60.00Hz Lamp Flux:731.922x1 lm		
NAME: WL-3COVE1FT10WAD1UV-1010-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	2424	2525	3203	4448	2424	2525	3203	4448										
5	8579	3232	1625	1324	993	1227	2451	9290										
10	6158	1619	867	690	553	693	1173	3323										
15	1563	846	489	383	304	380	655	1100										
20	776	493	281	207	164	209	372	593										
25	430	281	159	123	97.7	127	203	321										
30	227	156	103	80.2	67.6	81.8	120	170										
35	124	94.9	69.0	54.5	49.3	56.1	79.9	104										
40	81.2	65.1	48.5	39.1	36.8	40.7	55.6	70.0										
45	57.9	47.1	36.4	29.5	27.8	31.1	40.9	49.0										
50	43.8	35.0	28.0	22.8	21.5	24.1	31.8	36.1										
55	33.1	26.8	21.3	17.6	16.4	18.5	24.2	27.3										
60	25.2	21.2	16.2	12.8	11.8	13.6	18.6	21.4										
65	19.8	15.8	11.8	8.69	7.23	9.40	13.9	16.3										
70	15.0	11.2	7.63	4.75	3.67	5.18	9.50	11.6										
75	10.7	7.19	3.90	2.17	1.48	2.34	5.30	7.56										
80	6.25	3.81	1.58	0.88	0.64	0.90	2.51	4.12										
85	2.74	1.46	0.47	0.20	0.12	0.30	0.79	1.57										
90	1.26	0.62	0.00	0.08	0.13	0.08	0.00	0.72										
95	0.42	0.09	0.00	0.09	0.14	0.09	0.00	0.11										
100	0.10	0.10	0.02	0.08	0.16	0.10	0.00	0.08										
105	0.14	0.10	0.01	0.12	0.15	0.09	0.00	0.09										
110	0.14	0.09	0.03	0.11	0.14	0.09	0.00	0.08										
115	0.14	0.09	0.04	0.18	0.22	0.12	0.00	0.09										
120	0.15	0.12	0.07	0.27	0.32	0.22	0.01	0.09										
125	0.17	0.20	0.08	0.28	0.32	0.22	0.02	0.15										
130	0.26	0.29	0.12	0.33	0.32	0.21	0.03	0.23										
135	0.40	0.33	0.17	0.39	0.33	0.21	0.05	0.25										
140	0.44	0.38	0.27	0.50	0.33	0.22	0.08	0.25										
145	0.51	0.47	0.46	0.78	0.44	0.27	0.13	0.27										
150	0.61	0.62	0.76	1.41	0.71	0.42	0.22	0.30										
155	0.81	0.94	1.50	3.16	0.95	0.70	0.39	0.37										
160	1.23	1.71	2.70	3.49	1.00	0.87	0.65	0.61										
165	2.63	3.23	2.45	1.93	0.98	0.89	0.83	0.85										
170	4.13	2.76	1.53	1.29	0.99	0.87	0.90	0.98										
175	2.24	1.59	1.12	0.96	1.05	0.88	0.91	1.01										
180	1.47	1.14	0.90	0.97	1.47	1.14	0.90	0.96										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: