


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.41 lm/W			
MODEL		I _{max} (cd)	5353	S/MH (C0/180)	0.53
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH (C90/270)	0.41
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	756.11	η UP,DN (C0-180)	0.1,61.4
NOMINAL FLUX(lm)	756.111	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.1,38.3
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

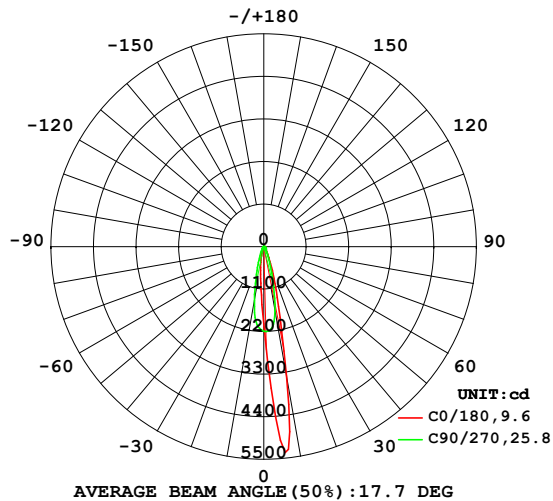

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

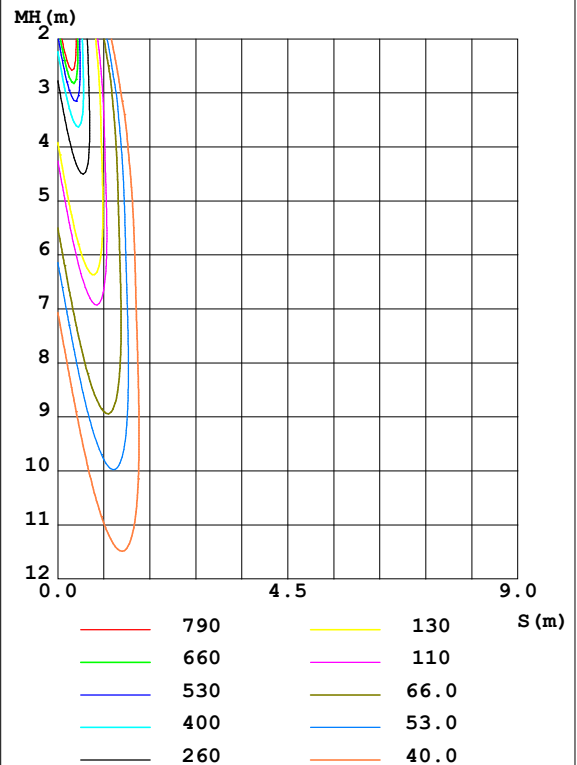

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3397	4969	1683	797.7	477.8	602.6	1422	3533	0- 10	241.4	241.4	31.9,31.9
20	657.2	840.0	479.6	230.9	150.7	182.2	383.7	572.5	10- 20	271.9	513.3	67.9,67.9
30	174.3	210.5	150.3	90.53	66.68	79.11	128.0	156.8	20- 30	109.9	623.2	82.4,82.4
40	70.16	77.16	68.00	46.16	36.18	41.64	59.77	64.80	30- 40	54.21	677.4	89.6,89.6
50	38.15	39.46	34.69	25.78	22.60	23.89	31.20	33.53	40- 50	32.82	710.2	93.9,93.9
60	23.51	22.50	20.54	16.60	13.95	15.37	19.72	19.52	50- 60	21.68	731.9	96.8,96.8
70	14.51	14.19	12.02	8.300	4.822	6.098	10.48	12.00	60- 70	14.70	746.6	98.7,98.7
80	6.113	4.740	2.718	1.301	0.6909	0.8564	2.022	3.415	70- 80	6.428	753.0	99.6,99.6
90	1.002	0.6694	0.0007	0.0727	0.1283	0.0727	0	0.3643	80- 90	1.237	754.3	99.8,99.8
100	0.1186	0.0703	0.0097	0.1305	0.1692	0.0703	0.0024	0.0630	90-100	0.1442	754.4	99.8,99.8
110	0.1259	0.0920	0.0266	0.1113	0.1357	0.0824	0.0049	0.0776	100-110	0.0852	754.5	99.8,99.8
120	0.1211	0.0945	0.0436	0.2543	0.3244	0.2108	0.0194	0.0727	110-120	0.1082	754.6	99.8,99.8
130	0.2418	0.2543	0.1040	0.3003	0.3125	0.2107	0.0485	0.2228	120-130	0.1527	754.8	99.8,99.8
140	0.3851	0.3174	0.2420	0.4217	0.3029	0.2397	0.1164	0.2455	130-140	0.1869	754.9	99.8,99.8
150	0.5278	0.5283	0.7211	1.225	0.6450	0.5543	0.3370	0.3027	140-150	0.2553	755.2	99.9,99.9
160	1.110	1.350	1.445	2.119	1.017	0.8548	0.6470	0.6076	150-160	0.4044	755.6	99.9,99.9
170	3.009	2.310	1.562	1.343	0.9880	0.8719	0.8309	0.8839	160-170	0.3802	756.0	100,100
180	1.354	1.269	1.032	0.8985	1.361	1.274	1.027	0.8912	170-180	0.1252	756.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

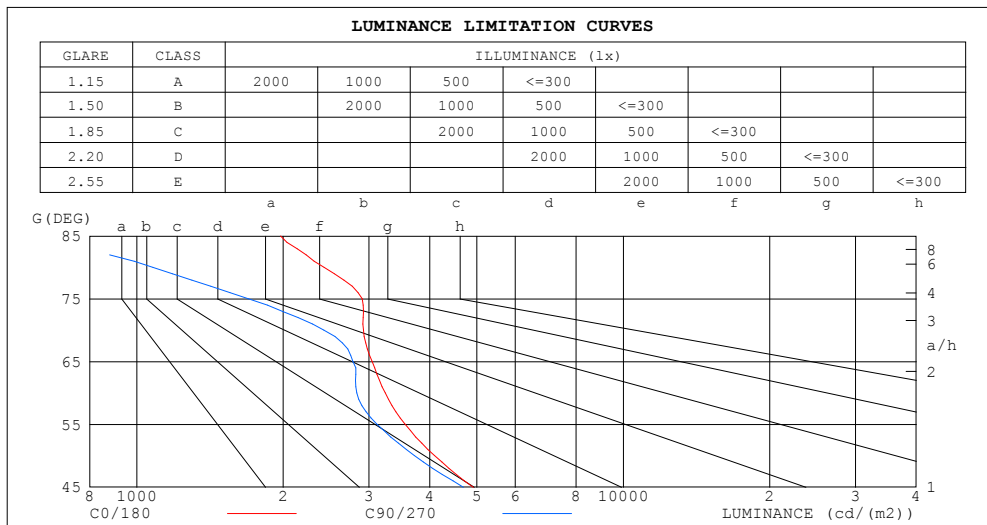

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1976	597
80	2428	1080
75	2906	1695
70	2926	2424
65	3048	2782
60	3242	2833
55	3563	3118
50	4093	3722
45	4917	4689


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.00	.99	.98	.97	.96	.95
2.0	1.05	1.01	.98	1.03	1.00	.97	1.00	.97	.95	.97	.95	.93	.94	.93	.91	.90
3.0	.99	.95	.92	.98	.94	.91	.95	.92	.89	.93	.90	.88	.91	.89	.87	.85
4.0	.94	.90	.86	.93	.89	.86	.91	.88	.85	.89	.86	.84	.88	.85	.83	.81
5.0	.90	.85	.82	.89	.85	.81	.88	.84	.81	.86	.83	.80	.84	.82	.79	.78
6.0	.86	.81	.78	.86	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.76	.75
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
8.0	.80	.75	.72	.80	.75	.72	.79	.74	.71	.78	.74	.71	.77	.73	.71	.70
9.0	.77	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.69	.68
10.0	.75	.70	.67	.74	.70	.67	.74	.70	.67	.73	.69	.67	.72	.69	.67	.65

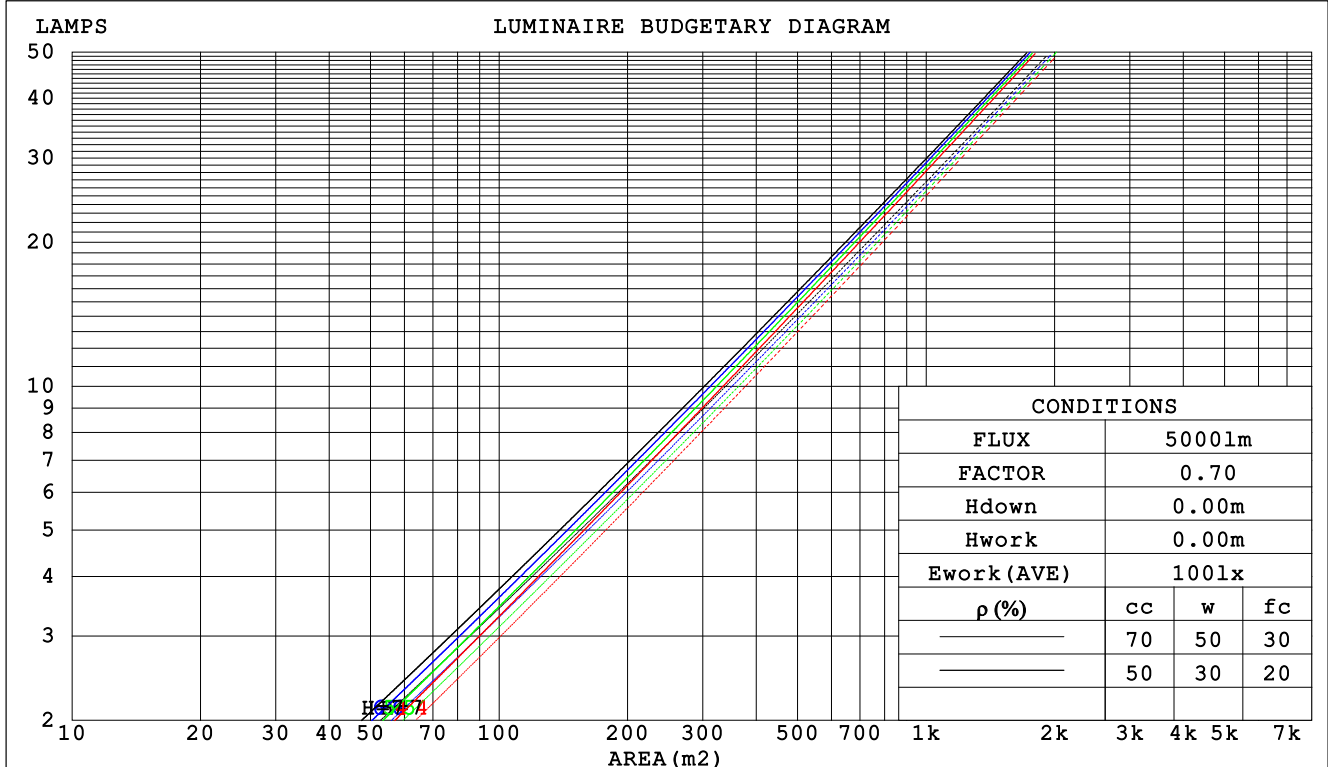

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm					
NAME: WL-3COVE1FT10WAD1UV-1515-GR			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 1FT		SERIAL No.:
MFR.: WS			SUR.:0.29*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.162	.092	.029	.155	.088	.028	.142	.082	.026	.131	.075	.024	.120	.070	.022		
2.0	.152	.083	.025	.146	.080	.025	.135	.075	.023	.126	.070	.022	.117	.066	.021		
3.0	.141	.075	.023	.137	.073	.022	.128	.069	.021	.120	.066	.020	.112	.062	.019		
4.0	.132	.069	.020	.128	.067	.020	.121	.064	.019	.114	.061	.018	.107	.058	.018		
5.0	.124	.063	.018	.121	.062	.018	.114	.059	.018	.108	.057	.017	.102	.055	.016		
6.0	.117	.059	.017	.114	.058	.017	.108	.056	.016	.103	.054	.016	.098	.052	.015		
7.0	.111	.055	.015	.108	.054	.015	.103	.052	.015	.098	.050	.015	.094	.049	.014		
8.0	.105	.051	.014	.102	.050	.014	.098	.049	.014	.094	.048	.014	.090	.046	.013		
9.0	.100	.048	.013	.098	.048	.013	.094	.046	.013	.090	.045	.013	.087	.044	.013		
10.0	.095	.046	.013	.093	.045	.013	.090	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.172	.159	.148	.147	.137	.127	.101	.094	.088	.058	.054	.051	.019	.018	.017	
2.0	.155	.134	.117	.133	.116	.101	.091	.080	.070	.053	.047	.041	.017	.015	.013	
3.0	.142	.115	.094	.121	.099	.082	.083	.069	.057	.048	.040	.034	.015	.013	.011	
4.0	.130	.100	.078	.112	.087	.067	.077	.060	.047	.044	.035	.028	.014	.012	.009	
5.0	.120	.088	.065	.103	.076	.056	.071	.053	.040	.041	.031	.024	.013	.010	.008	
6.0	.111	.079	.055	.096	.068	.048	.066	.048	.034	.038	.028	.020	.012	.009	.007	
7.0	.104	.071	.047	.089	.061	.041	.062	.043	.029	.036	.025	.017	.012	.008	.006	
8.0	.098	.064	.041	.084	.055	.036	.058	.039	.025	.034	.023	.015	.011	.008	.005	
9.0	.092	.058	.036	.079	.051	.031	.055	.036	.022	.032	.021	.013	.010	.007	.004	
10.0	.087	.054	.032	.075	.047	.028	.052	.033	.020	.030	.019	.012	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm										
NAME: WL-3COVE1FT10WAD1UV-1515-GR					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 1FT			SERIAL No.:		
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.1	13.9	13.3	14.1	14.2	12.7	13.5	13.0	13.7	13.8
3H	14.2	14.9	14.4	15.1	15.3	13.7	14.4	13.9	14.6	14.8
4H	14.7	15.3	14.9	15.6	15.8	13.9	14.6	14.2	14.8	15.1
6H	15.0	15.7	15.3	15.9	16.1	14.0	14.7	14.3	14.9	15.1
8H	15.1	15.7	15.4	16.0	16.2	14.0	14.6	14.3	14.9	15.1
12H	15.1	15.7	15.5	16.0	16.3	14.0	14.6	14.3	14.8	15.1
4H 2H	13.5	14.2	13.8	14.4	14.6	13.2	13.9	13.4	14.1	14.3
3H	14.7	15.3	15.0	15.6	15.9	14.3	14.9	14.6	15.2	15.4
4H	15.3	15.9	15.7	16.2	16.5	14.6	15.2	15.0	15.5	15.8
6H	15.8	16.3	16.2	16.6	17.0	14.8	15.3	15.2	15.6	16.0
8H	15.9	16.4	16.3	16.7	17.1	14.8	15.2	15.2	15.6	16.0
12H	16.0	16.4	16.4	16.8	17.2	14.8	15.2	15.2	15.6	15.9
8H 4H	15.5	15.9	15.9	16.3	16.7	14.8	15.3	15.2	15.6	16.0
6H	16.0	16.4	16.4	16.8	17.2	15.0	15.4	15.5	15.8	16.2
8H	16.2	16.5	16.6	16.9	17.4	15.1	15.4	15.5	15.8	16.3
12H	16.3	16.6	16.8	17.0	17.5	15.1	15.4	15.5	15.8	16.3
12H 4H	15.4	15.9	15.9	16.2	16.6	14.8	15.2	15.2	15.6	16.0
6H	16.0	16.3	16.4	16.7	17.2	15.1	15.4	15.5	15.8	16.3
8H	16.2	16.5	16.7	16.9	17.4	15.1	15.4	15.6	15.8	16.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.5					+ 0.6 / - 0.7				
1.5H	+ 0.5 / - 0.4					+ 0.7 / - 0.7				
2.0H	+ 0.7 / - 0.4					+ 0.9 / - 0.7				

CIE Pub.117 Corrected 756.1 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	85	78	74	84	78	74	70
0.80	93	86	82	92	86	82	91	85	82	78
1.00	97	91	87	96	91	87	95	91	87	82
1.25	102	96	92	100	95	92	98	94	91	87
1.50	104	99	96	103	98	95	101	97	94	89
2.00	107	103	99	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	109	106	107	105	104	96
5.00	115	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

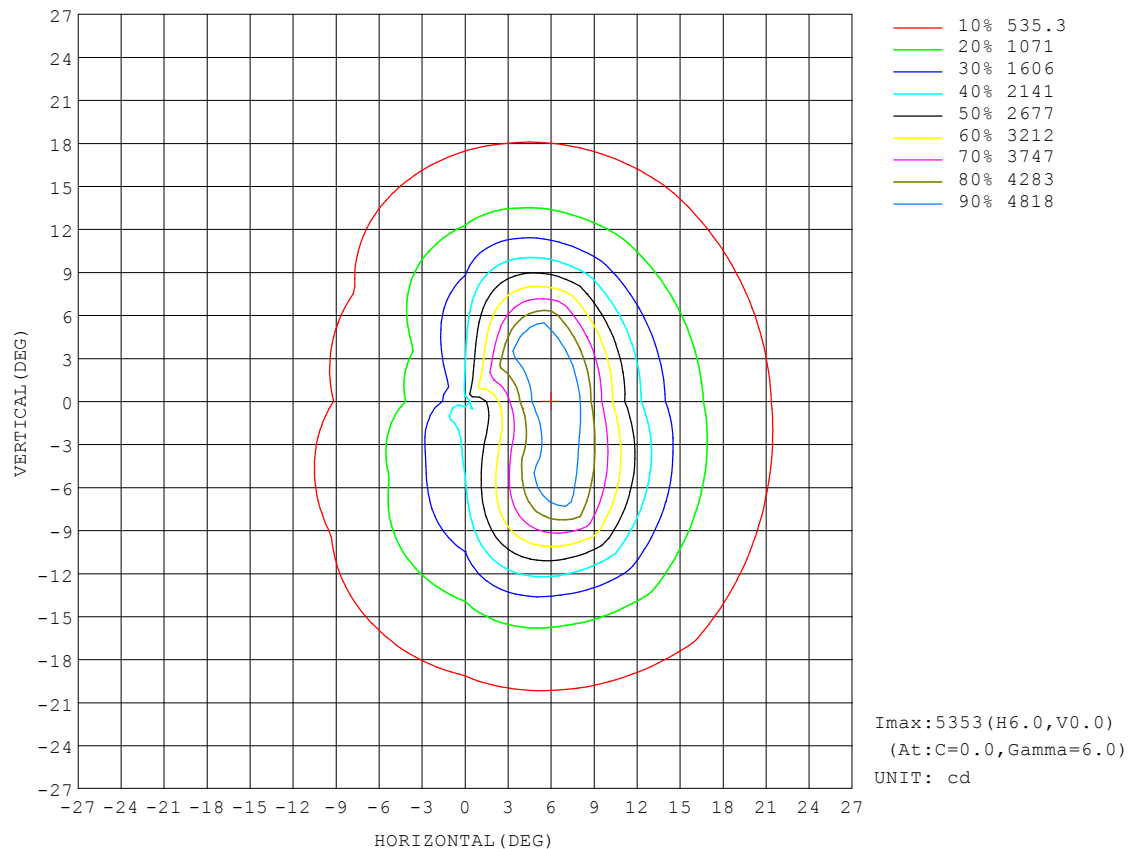


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

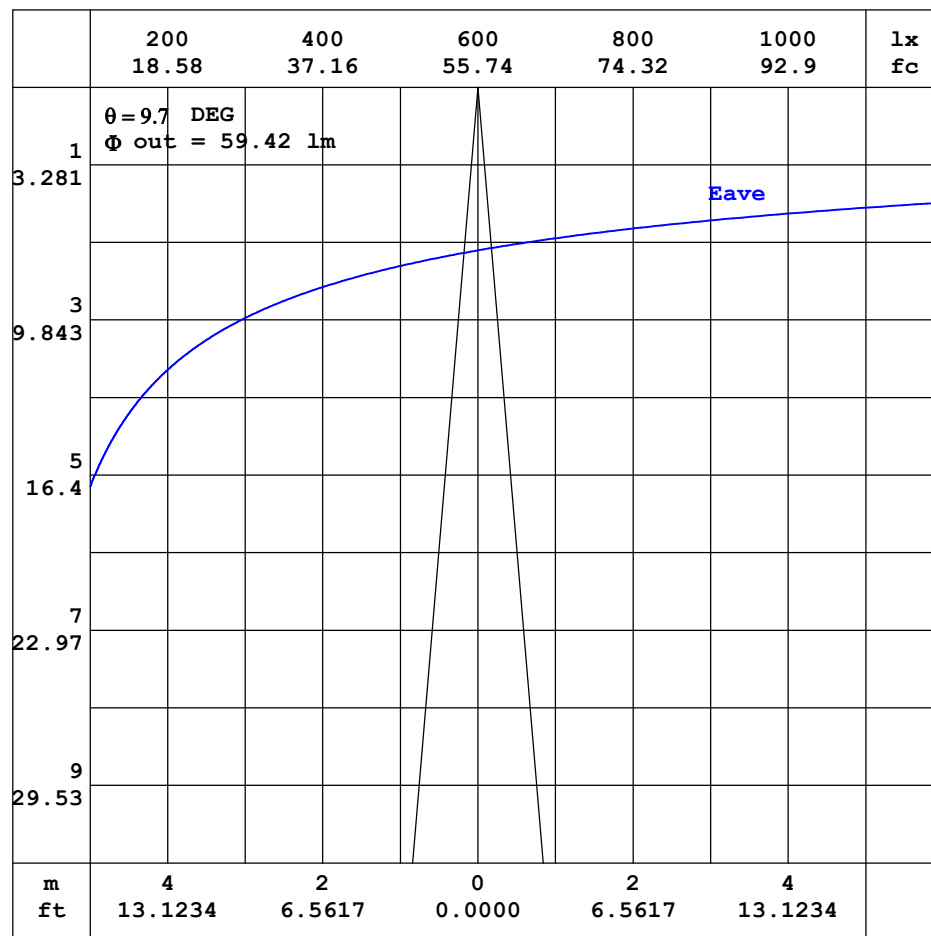


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

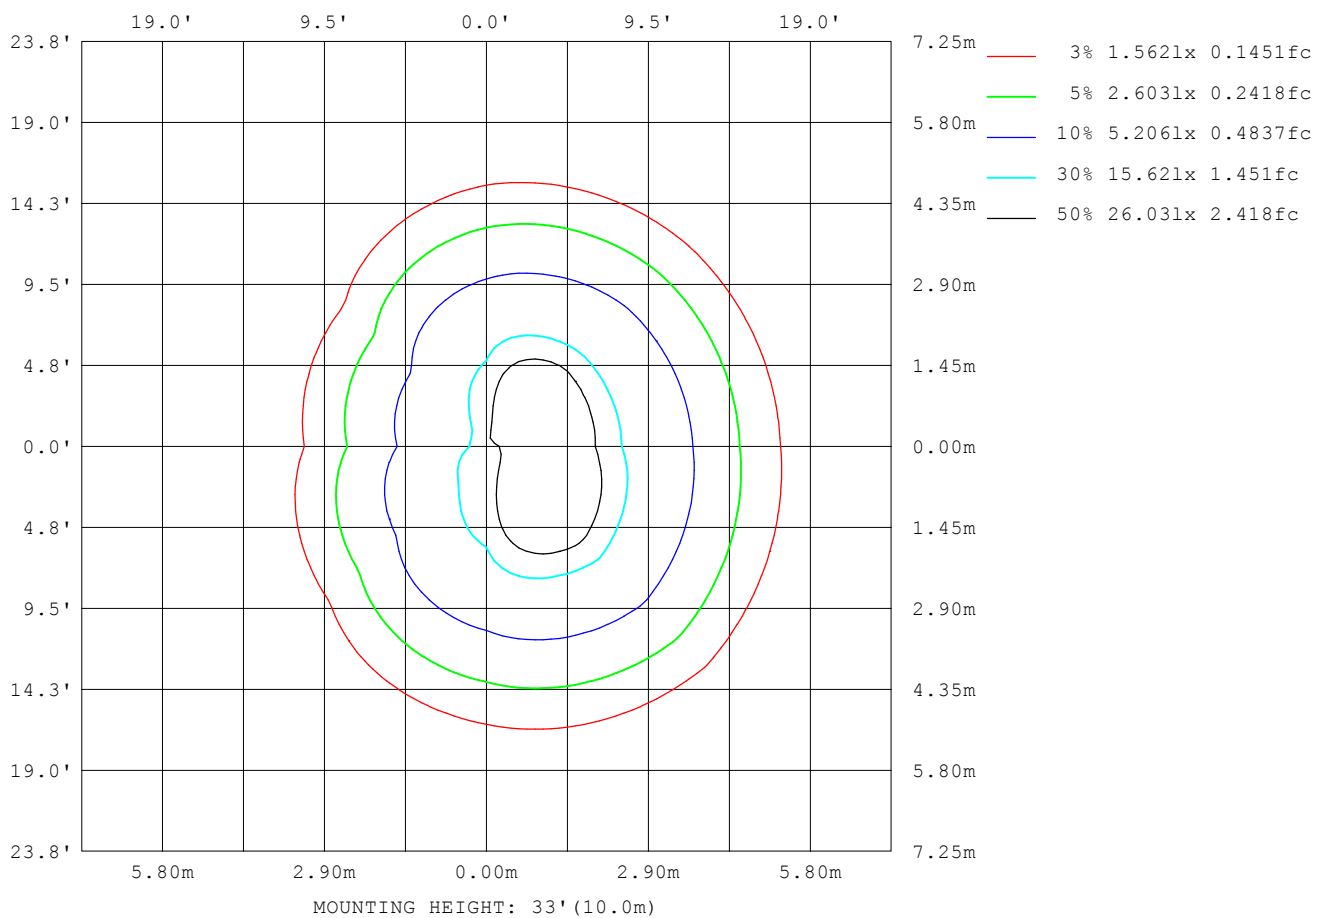

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.11lx1 lm		
NAME: WL-3COVE1FT10WAD1UV-1515-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2358
L_0~180 (75) av	1715
L_0~180 (85) av	1041
L_90~270 (65) av	2705
L_90~270 (75) av	1530
L_90~270 (85) av	494
L_45 (65) av	2370
L_45 (75) av	1521
L_45 (85) av	708

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

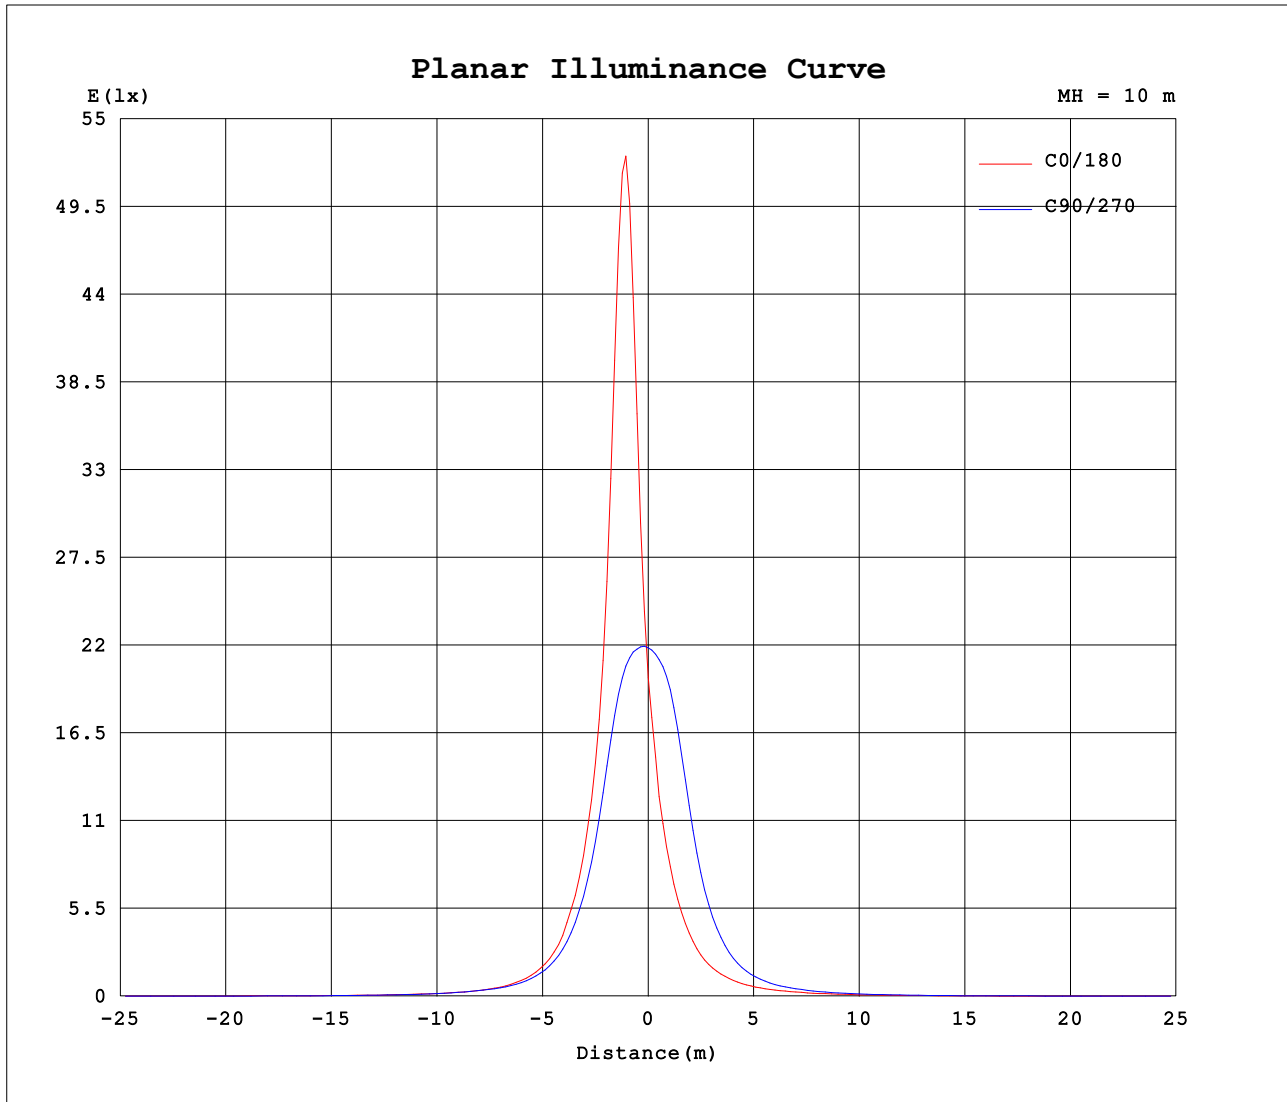

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0860A P:10.30W PF:0.9940 Freq:60.00Hz Lamp Flux:756.111x1 lm								
NAME: WL-3COVE1FT10WAD1UV-1515-GR					TYPE:3000K			WEIGHT:
SPEC.:					DIM.: 1FT			SERIAL No.:
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	1998	1934	2184	2671	1998	1934	2184	2671										
5	5025	3974	2147	1414	949	1077	2028	4960										
10	3397	4969	1683	798	478	603	1422	3533										
15	1368	2081	934	426	253	320	741	1217										
20	657	840	480	231	151	182	384	573										
25	318	403	257	140	96.3	115	211	284										
30	174	210	150	90.5	66.7	79.1	128	157										
35	105	119	97.8	63.6	48.2	56.9	85.8	96.1										
40	70.2	77.2	68.0	46.2	36.2	41.6	59.8	64.8										
45	50.4	54.2	48.1	34.1	28.3	31.0	42.9	46.1										
50	38.1	39.5	34.7	25.8	22.6	23.9	31.2	33.5										
55	29.6	29.3	25.9	20.3	17.9	19.3	23.8	25.0										
60	23.5	22.5	20.5	16.6	14.0	15.4	19.7	19.5										
65	18.7	18.0	17.0	13.1	10.2	10.9	16.1	16.1										
70	14.5	14.2	12.0	8.30	4.82	6.10	10.5	12.0										
75	10.9	9.49	6.36	3.68	1.97	2.45	5.13	7.22										
80	6.11	4.74	2.72	1.30	0.69	0.86	2.02	3.41										
85	2.50	1.80	0.75	0.42	0.14	0.16	0.49	1.20										
90	1.00	0.67	0.00	0.07	0.13	0.07	0.00	0.36										
95	0.30	0.08	0.01	0.11	0.16	0.07	0.00	0.07										
100	0.12	0.07	0.01	0.13	0.17	0.07	0.00	0.06										
105	0.14	0.08	0.03	0.10	0.16	0.08	0.01	0.07										
110	0.13	0.09	0.03	0.11	0.14	0.08	0.00	0.08										
115	0.14	0.09	0.04	0.14	0.21	0.15	0.02	0.07										
120	0.12	0.09	0.04	0.25	0.32	0.21	0.02	0.07										
125	0.14	0.15	0.08	0.27	0.31	0.21	0.03	0.15										
130	0.24	0.25	0.10	0.30	0.31	0.21	0.05	0.22										
135	0.36	0.27	0.16	0.33	0.26	0.20	0.08	0.23										
140	0.39	0.32	0.24	0.42	0.30	0.24	0.12	0.25										
145	0.44	0.40	0.42	0.66	0.41	0.36	0.20	0.26										
150	0.53	0.53	0.72	1.22	0.65	0.55	0.34	0.30										
155	0.71	0.80	1.14	2.01	0.91	0.73	0.49	0.40										
160	1.11	1.35	1.45	2.12	1.02	0.85	0.65	0.61										
165	2.22	1.97	1.60	1.80	1.02	0.89	0.77	0.78										
170	3.01	2.31	1.56	1.34	0.99	0.87	0.83	0.88										
175	1.85	1.86	1.27	0.99	1.02	0.95	0.89	0.91										
180	1.35	1.27	1.03	0.90	1.36	1.27	1.03	0.89										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks: