


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.30 lm/W			
MODEL		Imax(cd)	5462	S/MH(C0/180)	0.27
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.33
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	737.42	η UP,DN(C0-180)	0.1,44.0
NOMINAL FLUX(lm)	737.423	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,55.8
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

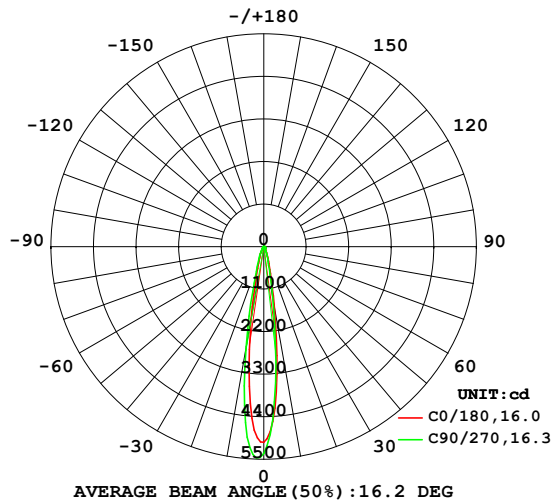

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

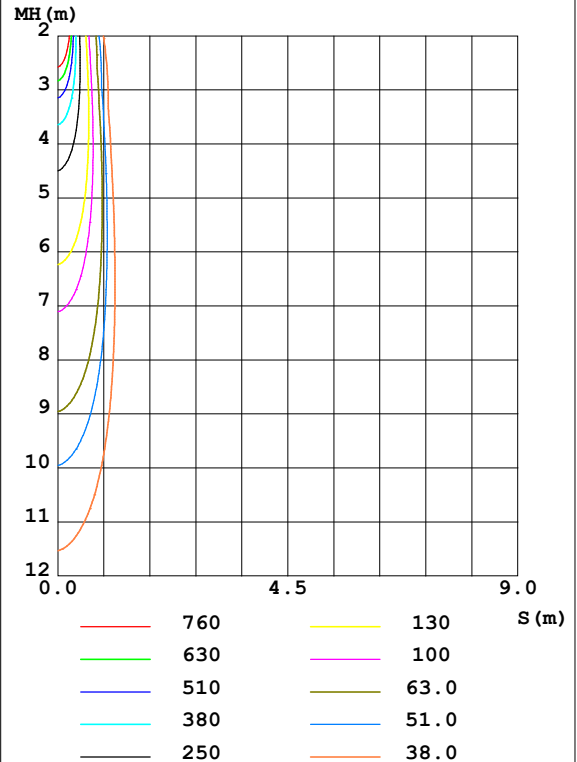

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1597	1325	1354	1915	1918	2560	2627	1743	0- 10	314.9	314.9	42.7,42.7
20	322.4	286.6	280.2	351.5	358.4	418.2	425.5	334.8	10- 20	218.0	532.9	72.3,72.3
30	98.68	86.15	88.02	106.0	110.0	129.0	130.1	101.3	20- 30	91.05	624.0	84.6,84.6
40	49.04	44.71	45.09	48.83	51.09	54.32	55.10	48.63	30- 40	43.71	667.7	90.5,90.5
50	28.40	25.32	26.05	27.19	29.12	30.24	31.36	27.08	40- 50	29.06	696.7	94.5,94.5
60	18.21	15.60	16.31	16.55	18.11	18.19	19.15	16.54	50- 60	19.83	716.6	97.2,97.2
70	9.797	7.589	7.772	8.605	9.426	9.531	10.12	8.475	60- 70	12.92	729.5	98.9,98.9
80	1.923	1.490	1.527	2.128	2.346	2.542	2.745	1.796	70- 80	5.403	734.9	99.7,99.7
90	0.1712	0.0798	0.0001	0.1376	0.2435	0.3616	0	0.1197	80- 90	0.9622	735.9	99.8,99.8
100	0.1285	0.0703	0.0169	0.0969	0.1718	0.0923	0	0.0654	90-100	0.0842	735.9	99.8,99.8
110	0.1213	0.0847	0.0121	0.1113	0.1623	0.0943	0.0025	0.0774	100-110	0.0892	736.0	99.8,99.8
120	0.1501	0.1624	0.0315	0.1892	0.1577	0.1282	0.0170	0.1089	110-120	0.0885	736.1	99.8,99.8
130	0.3753	0.2688	0.0558	0.2706	0.3391	0.1988	0.0411	0.2180	120-130	0.1701	736.3	99.8,99.8
140	0.4165	0.3271	0.1525	0.2810	0.3098	0.1913	0.0799	0.2422	130-140	0.1787	736.5	99.9,99.9
150	0.6413	0.6376	0.5202	0.5383	0.3880	0.2977	0.2207	0.3703	140-150	0.2005	736.7	99.9,99.9
160	1.404	1.480	1.310	1.446	0.7681	0.6971	0.6568	0.8279	150-160	0.3406	737.0	99.9,99.9
170	1.231	1.164	1.165	1.387	0.9120	0.9203	0.9324	0.9930	160-170	0.3261	737.3	100,100
180	0.8476	0.8549	0.9106	0.9566	0.8404	0.8525	0.9130	0.9639	170-180	0.0950	737.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

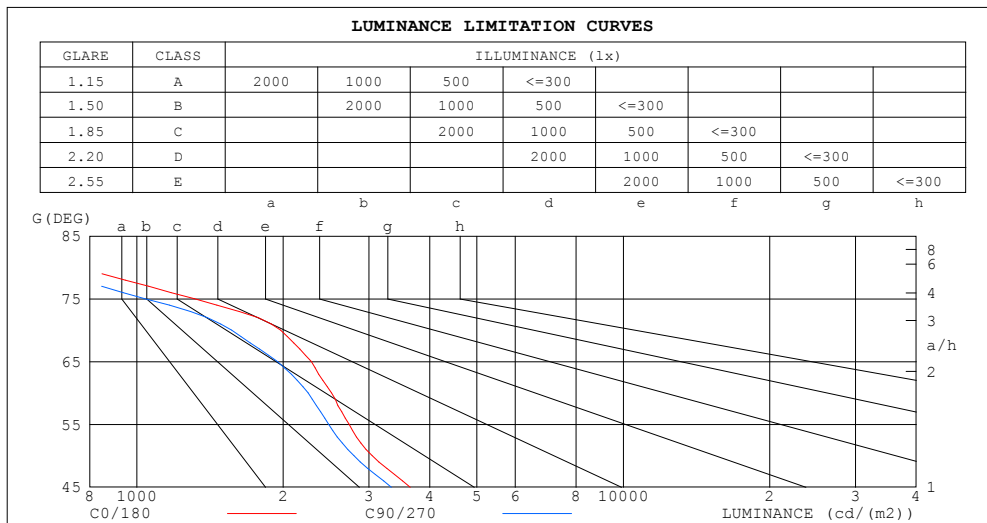


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.99	.97	.98	.96	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.00	.96	.93	.97	.94	.91	.95	.92	.90	.92	.90	.89	.87
4.0	.96	.92	.89	.95	.91	.88	.93	.90	.87	.91	.89	.86	.90	.87	.85	.84
5.0	.93	.88	.85	.92	.88	.84	.90	.86	.84	.89	.85	.83	.87	.84	.82	.81
6.0	.89	.85	.82	.89	.84	.81	.87	.83	.81	.86	.83	.80	.85	.82	.80	.79
7.0	.86	.82	.79	.86	.81	.78	.85	.81	.78	.83	.80	.78	.82	.80	.77	.76
8.0	.84	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.79	.75	.73	.72
10.0	.79	.75	.72	.79	.75	.72	.78	.74	.72	.77	.74	.72	.77	.74	.72	.71

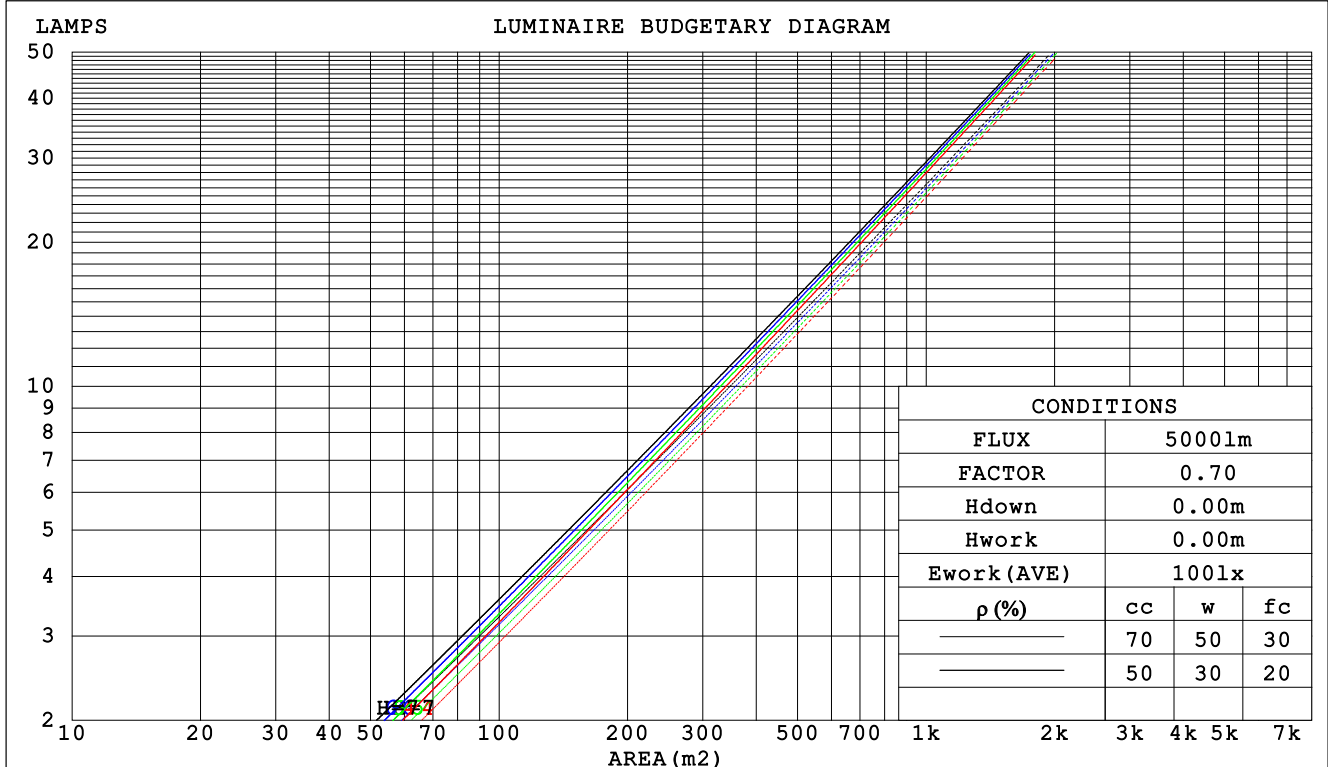

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm					
NAME: WL-3COVE1FT10WAD1UV-18-GR			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 1FT		SERIAL No.:
MFR.: WS			SUR.:0.29*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.152	.086	.027	.145	.083	.026	.132	.076	.024	.121	.070	.022	.110	.064	.021	
2.0	.142	.078	.024	.136	.075	.023	.126	.070	.022	.116	.065	.020	.107	.061	.019	
3.0	.132	.070	.021	.127	.068	.020	.118	.064	.019	.110	.060	.019	.103	.057	.018	
4.0	.123	.064	.019	.119	.062	.018	.111	.059	.018	.104	.056	.017	.098	.053	.016	
5.0	.115	.058	.017	.111	.057	.017	.105	.055	.016	.099	.052	.016	.094	.050	.015	
6.0	.108	.054	.015	.105	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014	
7.0	.102	.050	.014	.099	.049	.014	.094	.048	.014	.090	.046	.013	.085	.044	.013	
8.0	.096	.047	.013	.094	.046	.013	.090	.045	.013	.086	.043	.013	.082	.042	.012	
9.0	.091	.044	.012	.089	.043	.012	.085	.042	.012	.082	.041	.012	.079	.040	.012	
10.0	.087	.042	.012	.085	.041	.011	.082	.040	.011	.078	.039	.011	.075	.038	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.149	.146	.137	.128	.100	.094	.088	.058	.054	.051	.018	.018	.017	
2.0	.154	.134	.118	.132	.116	.102	.090	.080	.071	.052	.047	.042	.017	.015	.014	
3.0	.139	.115	.096	.120	.099	.083	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.100	.079	.109	.086	.068	.075	.060	.048	.043	.035	.029	.014	.011	.009	
5.0	.117	.088	.066	.100	.076	.057	.069	.053	.041	.040	.031	.024	.013	.010	.008	
6.0	.108	.078	.056	.093	.067	.049	.064	.047	.035	.037	.028	.021	.012	.009	.007	
7.0	.100	.070	.048	.086	.060	.042	.060	.042	.030	.035	.025	.018	.011	.008	.006	
8.0	.094	.063	.042	.081	.055	.036	.056	.038	.026	.032	.023	.015	.010	.007	.005	
9.0	.088	.057	.037	.076	.050	.032	.052	.035	.023	.031	.021	.014	.010	.007	.004	
10.0	.083	.052	.032	.071	.046	.028	.049	.032	.020	.029	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity:65.0%
 Test Distance:7.540m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm										
NAME: WL-3COVE1FT10WAD1UV-18-GR					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 1FT			SERIAL No.:		
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.6	11.3	10.8	11.4	11.6	10.2	10.9	10.4	11.0	11.2
3H	11.6	12.2	11.8	12.4	12.6	11.0	11.6	11.2	11.8	12.0
4H	11.8	12.5	12.1	12.7	12.9	11.2	11.8	11.4	12.0	12.2
6H	11.9	12.5	12.1	12.7	12.9	11.2	11.8	11.5	12.0	12.3
8H	11.8	12.4	12.1	12.7	12.9	11.1	11.7	11.4	12.0	12.2
12H	11.8	12.4	12.1	12.7	12.9	11.1	11.7	11.4	11.9	12.2
4H 2H	10.9	11.5	11.2	11.8	12.0	10.5	11.2	10.8	11.4	11.6
3H	12.0	12.6	12.3	12.8	13.1	11.5	12.0	11.8	12.3	12.6
4H	12.3	12.8	12.6	13.1	13.4	11.7	12.2	12.0	12.5	12.8
6H	12.4	12.8	12.7	13.2	13.5	11.7	12.2	12.1	12.5	12.9
8H	12.4	12.8	12.7	13.1	13.5	11.7	12.1	12.1	12.5	12.9
12H	12.3	12.7	12.8	13.1	13.5	11.7	12.1	12.1	12.4	12.8
8H 4H	12.3	12.7	12.7	13.1	13.4	11.7	12.1	12.1	12.5	12.9
6H	12.4	12.7	12.8	13.1	13.5	11.8	12.1	12.2	12.5	12.9
8H	12.4	12.7	12.8	13.1	13.6	11.8	12.1	12.2	12.5	12.9
12H	12.4	12.7	12.9	13.1	13.6	11.7	12.0	12.2	12.4	12.9
12H 4H	12.2	12.6	12.6	13.0	13.4	11.7	12.1	12.1	12.4	12.8
6H	12.3	12.6	12.8	13.1	13.5	11.7	12.1	12.2	12.5	12.9
8H	12.3	12.6	12.8	13.1	13.5	11.7	12.0	12.2	12.4	12.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.7				
1.5H	+ 0.5 / - 0.4					+ 0.5 / - 0.4				
2.0H	+ 1.0 / - 0.7					+ 0.9 / - 0.7				

CIE Pub.117 Corrected 737.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.1)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	92	87	83	91	86	83	79
1.00	98	92	88	97	91	88	95	91	87	83
1.25	102	96	93	101	96	92	99	95	92	87
1.50	105	100	96	103	99	96	101	97	95	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

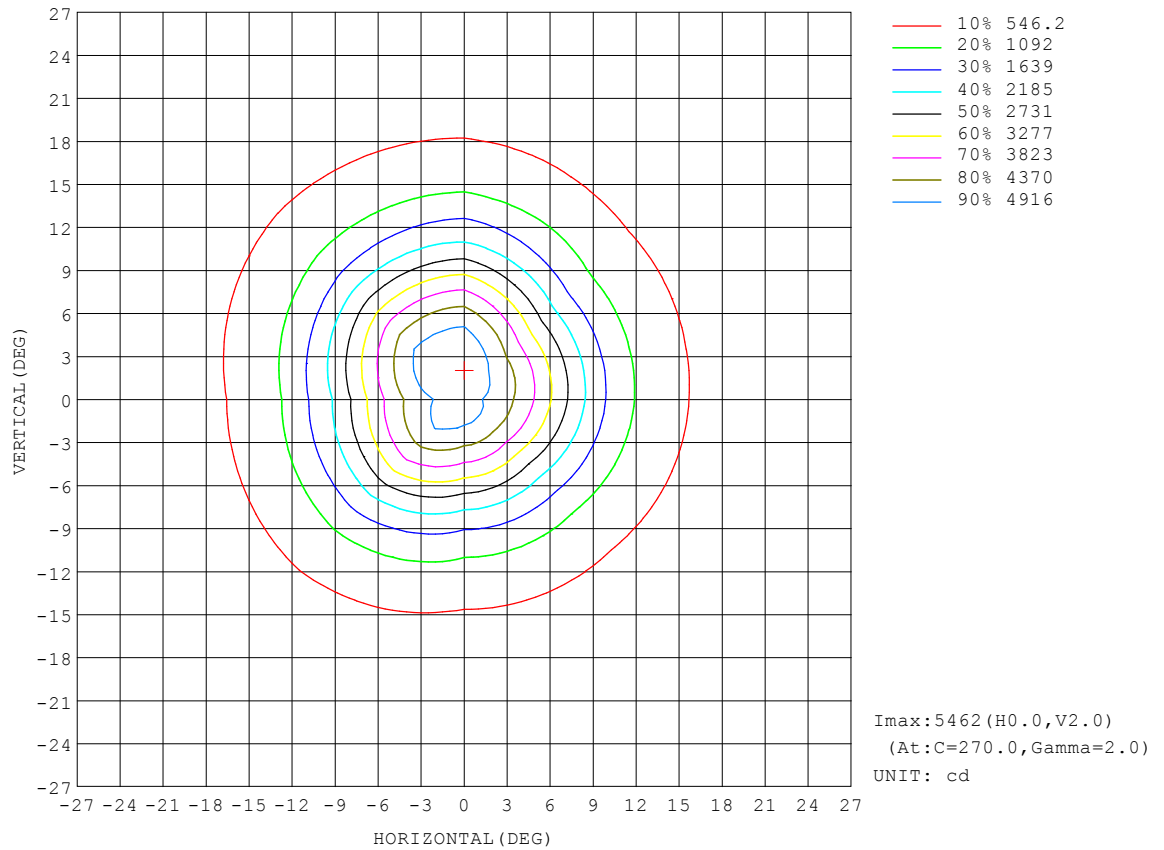


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

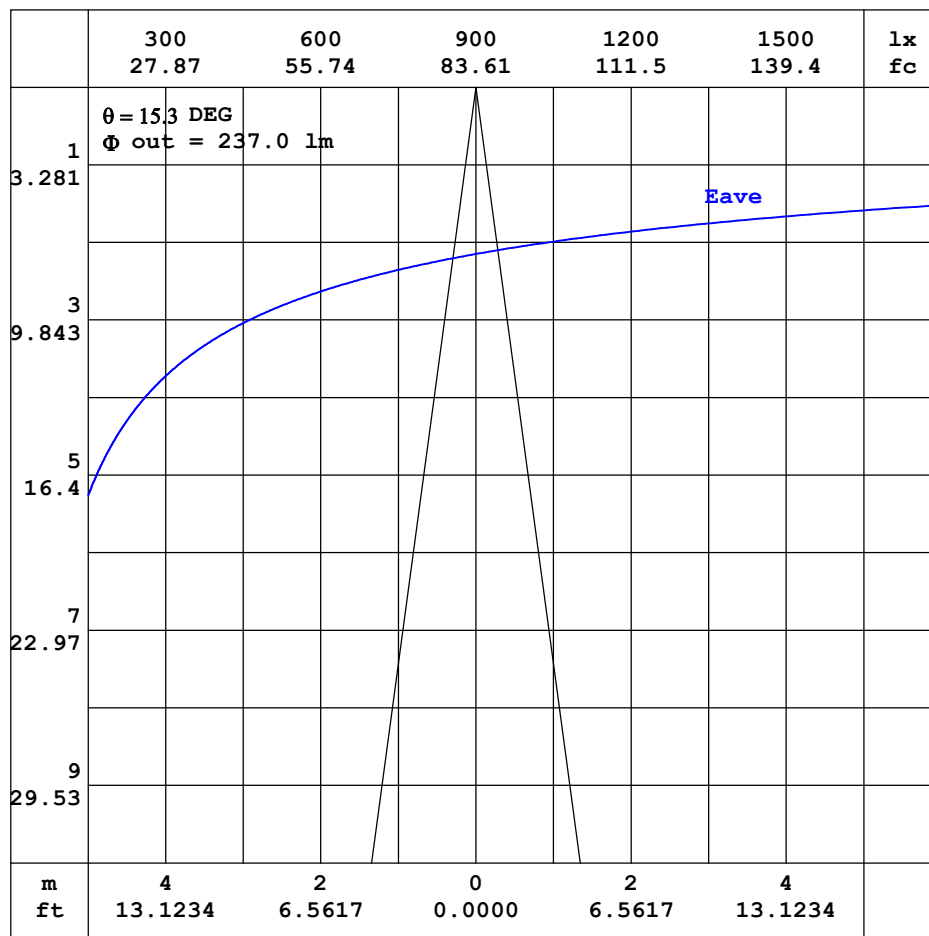


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

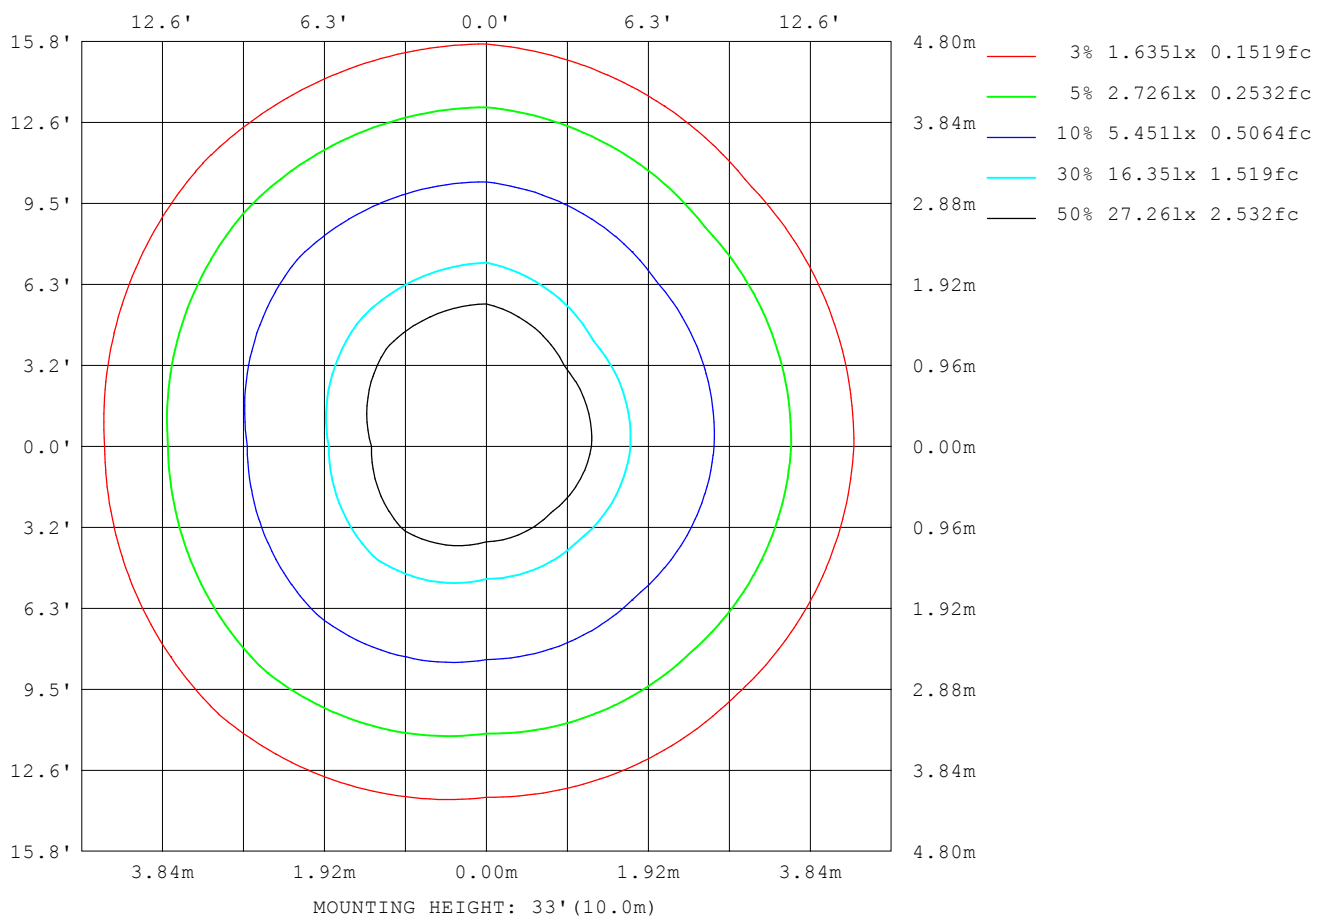

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm		
NAME: WL-3COVE1FT10WAD1UV-18-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2262
L_0~180 (75) av	1319
L_0~180 (85) av	730
L_90~270 (65) av	2186
L_90~270 (75) av	1352
L_90~270 (85) av	506
L_45 (65) av	2045
L_45 (75) av	1288
L_45 (85) av	637

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

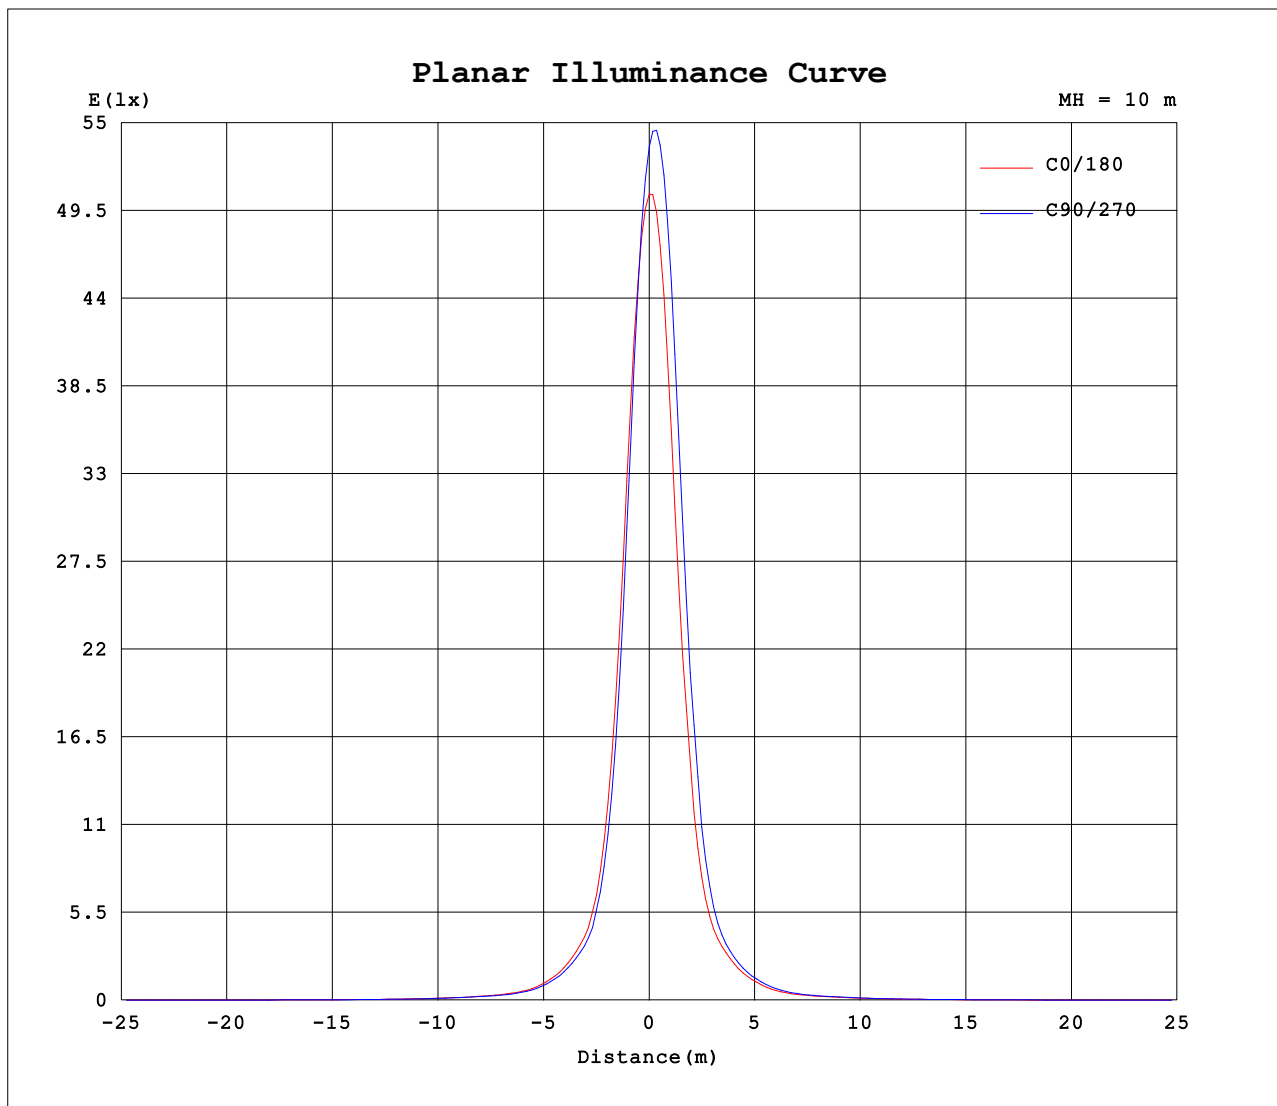

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.0860A P:10.20W PF:0.9940 Freq:60.00Hz Lamp Flux:737.423x1 lm								
NAME: WL-3COVE1FT10WAD1UV-18-GR					TYPE:3000K			WEIGHT:
SPEC.:					DIM.: 1FT			SERIAL No.:
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	5054	5291	5349	5237	5054	5291	5349	5237										
5	3773	3417	3526	4210	4071	4899	4942	4024										
10	1597	1325	1354	1915	1918	2560	2627	1743										
15	617	515	508	705	705	952	978	683										
20	322	287	280	351	358	418	426	335										
25	178	158	157	195	200	233	235	184										
30	98.7	86.1	88.0	106	110	129	130	101										
35	65.2	59.0	59.4	66.0	68.6	76.0	77.2	65.2										
40	49.0	44.7	45.1	48.8	51.1	54.3	55.1	48.6										
45	37.4	33.3	34.2	36.4	38.5	40.6	41.5	36.2										
50	28.4	25.3	26.0	27.2	29.1	30.2	31.4	27.1										
55	22.7	20.0	20.6	21.1	22.8	23.1	24.2	21.1										
60	18.2	15.6	16.3	16.5	18.1	18.2	19.2	16.5										
65	14.0	11.5	11.9	12.4	13.7	13.9	14.9	12.4										
70	9.80	7.59	7.77	8.61	9.43	9.53	10.1	8.47										
75	4.93	3.94	3.90	5.00	4.96	5.73	6.25	4.67										
80	1.92	1.49	1.53	2.13	2.35	2.54	2.75	1.80										
85	0.93	0.62	0.43	0.82	0.92	0.99	0.85	0.80										
90	0.17	0.08	0.00	0.14	0.24	0.36	0.00	0.12										
95	0.12	0.08	0.00	0.08	0.13	0.08	0.00	0.06										
100	0.13	0.07	0.02	0.10	0.17	0.09	0.00	0.07										
105	0.14	0.09	0.01	0.08	0.18	0.13	0.00	0.09										
110	0.12	0.08	0.01	0.11	0.16	0.09	0.00	0.08										
115	0.13	0.09	0.02	0.10	0.15	0.09	0.01	0.08										
120	0.15	0.16	0.03	0.19	0.16	0.13	0.02	0.11										
125	0.26	0.25	0.04	0.29	0.32	0.23	0.03	0.22										
130	0.38	0.27	0.06	0.27	0.34	0.20	0.04	0.22										
135	0.39	0.28	0.09	0.28	0.35	0.19	0.05	0.24										
140	0.42	0.33	0.15	0.28	0.31	0.19	0.08	0.24										
145	0.47	0.41	0.28	0.37	0.34	0.22	0.12	0.26										
150	0.64	0.64	0.52	0.54	0.39	0.30	0.22	0.37										
155	0.98	1.10	0.95	0.95	0.56	0.47	0.42	0.56										
160	1.40	1.48	1.31	1.45	0.77	0.70	0.66	0.83										
165	1.47	1.48	1.36	1.61	0.89	0.87	0.86	0.97										
170	1.23	1.16	1.17	1.39	0.91	0.92	0.93	0.99										
175	0.94	0.93	0.97	1.08	0.85	0.88	0.93	0.97										
180	0.85	0.85	0.91	0.96	0.84	0.85	0.91	0.96										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: