


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 64.92 lm/W			
MODEL		I _{max} (cd)	25007	S/MH(C0/180)	0.40
NOMINAL POWER(W)	10W	LOR(%)	100.0	S/MH(C90/270)	0.22
RATED VOLTAGE(V)	120.0	TOTAL FLUX(lm)	675.17	η UP,DN(C0-180)	0.1,49.2
NOMINAL FLUX(lm)	675.17	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.1,50.6
LAMPS INSIDE	1	η up(%)	0.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120.0	η down(%)	99.8	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

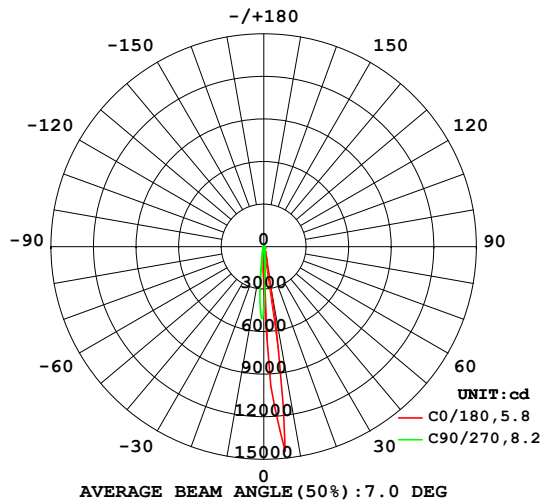

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

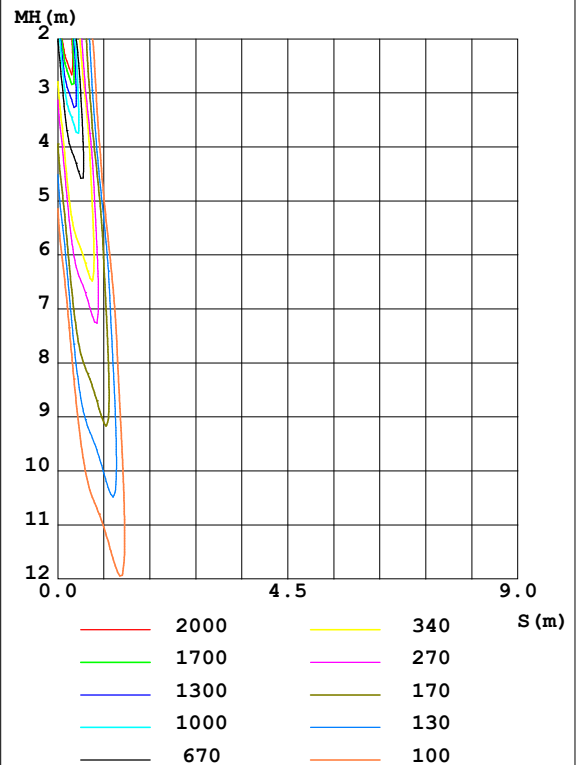

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	297.5	101.0	59.85	49.25	39.66	50.50	94.29	199.4	0- 10	348.7	348.7	51.6, 51.6
20	40.30	27.34	18.57	16.16	14.12	16.80	25.35	33.08	10- 20	132.3	480.9	71.2, 71.2
30	14.20	10.88	8.518	7.590	7.013	7.960	10.27	12.24	20- 30	69.54	550.5	81.5, 81.5
40	7.117	5.877	4.947	4.444	4.298	4.682	5.645	6.285	30- 40	45.20	595.7	88.2, 88.2
50	4.299	3.598	3.112	2.757	2.732	2.954	3.532	3.749	40- 50	32.87	628.6	93.1, 93.1
60	2.701	2.246	1.883	1.608	1.574	1.800	2.185	2.337	50- 60	23.77	652.3	96.6, 96.6
70	1.400	1.055	0.7906	0.6445	0.5959	0.7363	0.9764	1.132	60- 70	14.41	666.7	98.8, 98.8
80	0.4953	0.3067	0.1661	0.1238	0.1066	0.1341	0.2692	0.3511	70- 80	5.680	672.4	99.6, 99.6
90	0.0813	0.0331	0	0.0077	0.0121	0.0068	0	0.0456	80- 90	1.119	673.5	99.8, 99.8
100	0.0162	0.0102	0.0002	0.0090	0.0124	0.0068	0.0005	0.0119	90-100	0.1167	673.7	99.8, 99.8
110	0.0232	0.0121	0.0019	0.0097	0.0124	0.0073	0.0002	0.0087	100-110	0.0918	673.8	99.8, 99.8
120	0.0196	0.0170	0.0029	0.0201	0.0196	0.0143	0.0019	0.0121	110-120	0.1018	673.9	99.8, 99.8
130	0.0404	0.0276	0.0068	0.0269	0.0317	0.0199	0.0027	0.0252	120-130	0.1722	674.0	99.8, 99.8
140	0.0412	0.0291	0.0111	0.0266	0.0288	0.0174	0.0053	0.0247	130-140	0.1762	674.2	99.9, 99.9
150	0.0424	0.0366	0.0341	0.0606	0.0512	0.0295	0.0148	0.0257	140-150	0.1673	674.4	99.9, 99.9
160	0.0839	0.1103	0.1769	0.3097	0.0971	0.0867	0.0650	0.0663	150-160	0.3390	674.7	99.9, 99.9
170	0.2534	0.1519	0.0916	0.0956	0.0850	0.0782	0.0833	0.0971	160-170	0.3741	675.1	100, 100
180	0.0925	0.0700	0.0627	0.0751	0.0930	0.0697	0.0639	0.0729	170-180	0.0869	675.2	100, 100
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
 Humidity: 65.0%
 Test Distance: 7.540m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

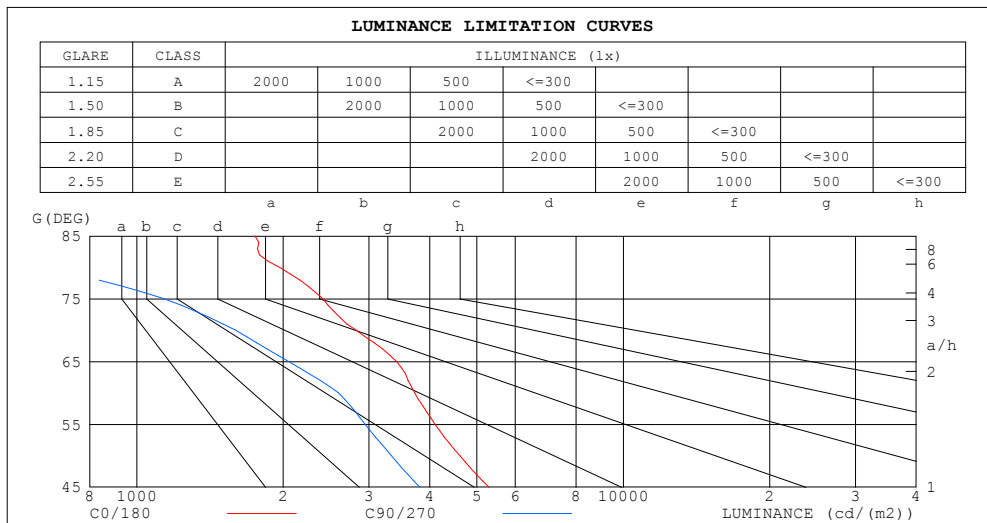

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1751	322
80	1967	660
75	2412	1138
70	2823	1594
65	3418	2051
60	3726	2598
55	4101	2945
50	4613	3339
45	5296	3820


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.03	.00	1.04	1.01	.99	1.01	.99	.97	.98	.96	.95	.96	.94	.93	.91
3.0	1.01	.97	.94	.00	.96	.93	.97	.94	.92	.95	.92	.90	.93	.90	.89	.87
4.0	.97	.92	.89	.96	.92	.88	.94	.90	.87	.92	.89	.86	.90	.87	.85	.84
5.0	.93	.89	.85	.92	.88	.85	.90	.87	.84	.89	.86	.83	.87	.85	.83	.81
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.81	.85	.82	.80	.79
7.0	.87	.83	.80	.86	.82	.79	.85	.82	.79	.84	.81	.79	.83	.80	.78	.77
8.0	.85	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.77	.81	.78	.76	.75
9.0	.82	.78	.75	.82	.78	.75	.81	.78	.75	.80	.77	.75	.80	.77	.75	.74
10.0	.81	.76	.74	.80	.76	.74	.79	.76	.73	.79	.76	.73	.78	.75	.73	.72

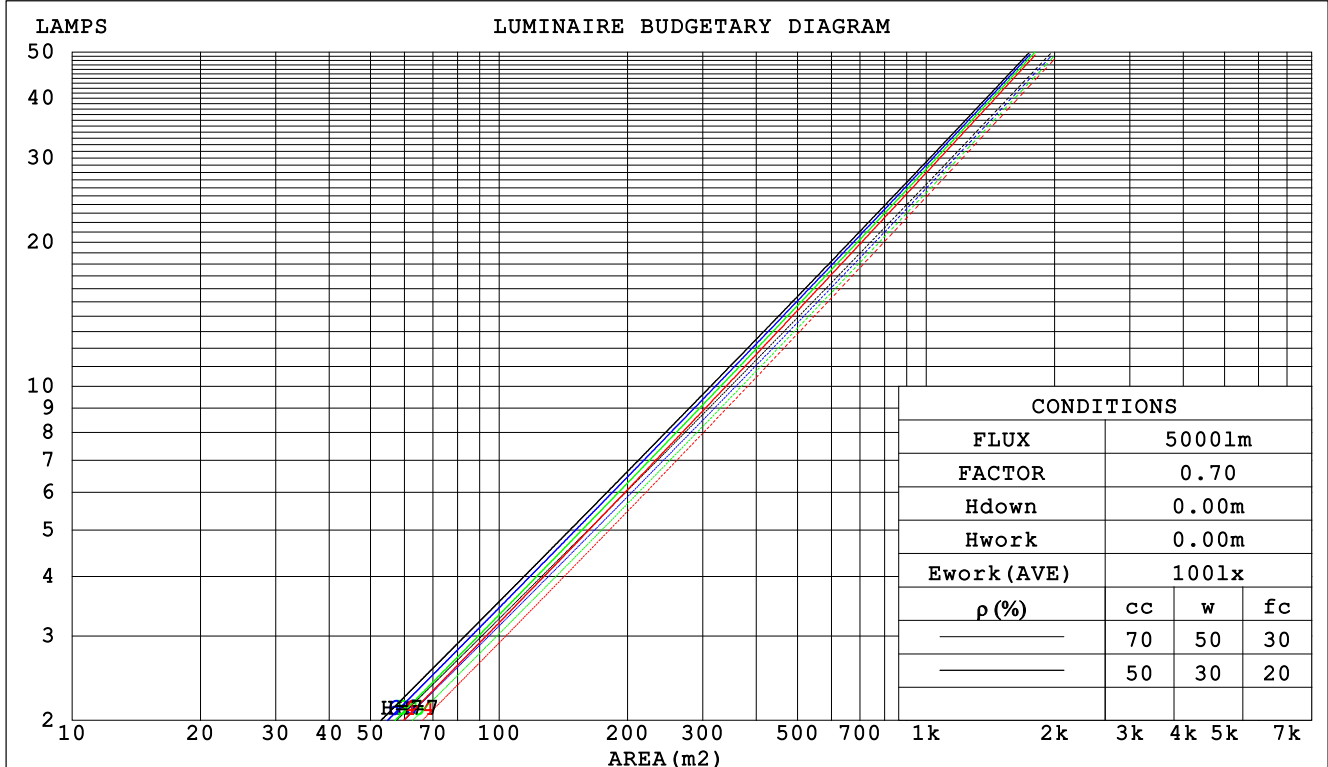

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm					
NAME: WL-3COVE1FT10WAD1UV-0707-GR			TYPE:3000K		WEIGHT:
SPEC.:			DIM.: 1FT		SERIAL No.:
MFR.: WS			SUR.:0.29*0.05		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.152	.086	.027	.145	.083	.026	.132	.076	.024	.121	.070	.022	.110	.064	.021		
2.0	.141	.077	.024	.136	.075	.023	.125	.070	.022	.116	.065	.020	.107	.060	.019		
3.0	.131	.070	.021	.126	.068	.020	.118	.064	.019	.110	.060	.018	.102	.056	.017		
4.0	.122	.063	.019	.118	.062	.018	.110	.059	.017	.104	.056	.017	.097	.053	.016		
5.0	.114	.058	.017	.110	.057	.016	.104	.054	.016	.098	.052	.015	.092	.049	.015		
6.0	.106	.053	.015	.103	.052	.015	.098	.050	.015	.093	.048	.014	.088	.046	.014		
7.0	.100	.049	.014	.097	.048	.014	.092	.047	.013	.088	.045	.013	.084	.043	.013		
8.0	.094	.046	.013	.092	.045	.013	.087	.044	.012	.083	.042	.012	.080	.041	.012		
9.0	.089	.043	.012	.087	.042	.012	.083	.041	.012	.079	.040	.011	.076	.039	.011		
10.0	.084	.040	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.171	.159	.149	.146	.137	.128	.100	.094	.089	.058	.054	.051	.018	.018	.017	
2.0	.154	.134	.118	.132	.116	.102	.090	.080	.071	.052	.047	.042	.017	.015	.014	
3.0	.140	.115	.096	.120	.099	.083	.082	.069	.058	.047	.040	.034	.015	.013	.011	
4.0	.127	.100	.079	.109	.086	.069	.075	.060	.048	.043	.035	.029	.014	.011	.009	
5.0	.117	.088	.066	.100	.076	.058	.069	.053	.041	.040	.031	.024	.013	.010	.008	
6.0	.108	.078	.057	.093	.067	.049	.064	.047	.035	.037	.028	.021	.012	.009	.007	
7.0	.100	.070	.049	.086	.060	.042	.059	.042	.030	.034	.025	.018	.011	.008	.006	
8.0	.093	.063	.042	.080	.055	.037	.055	.038	.026	.032	.023	.016	.010	.007	.005	
9.0	.087	.057	.037	.075	.050	.032	.052	.035	.023	.030	.021	.014	.010	.007	.005	
10.0	.082	.052	.033	.070	.045	.029	.049	.032	.020	.028	.019	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm										
NAME: WL-3COVE1FT10WAD1UV-0707-GR					TYPE:3000K			WEIGHT:		
SPEC.:					DIM.: 1FT			SERIAL No.:		
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.5	14.2	13.7	14.3	14.5	12.0	12.7	12.2	12.9	13.0
3H	14.5	15.1	14.7	15.3	15.5	12.7	13.3	12.9	13.5	13.7
4H	14.8	15.4	15.1	15.6	15.9	12.8	13.4	13.1	13.7	13.9
6H	15.0	15.6	15.3	15.9	16.1	12.8	13.4	13.1	13.7	13.9
8H	15.1	15.6	15.4	15.9	16.2	12.8	13.4	13.1	13.6	13.9
12H	15.1	15.7	15.4	15.9	16.2	12.8	13.3	13.1	13.6	13.9
4H 2H	13.8	14.4	14.0	14.6	14.8	12.6	13.2	12.8	13.4	13.6
3H	14.9	15.4	15.2	15.7	16.0	13.3	13.9	13.6	14.2	14.4
4H	15.3	15.8	15.6	16.1	16.4	13.5	14.1	13.9	14.3	14.7
6H	15.6	16.0	15.9	16.4	16.7	13.6	14.0	14.0	14.4	14.7
8H	15.6	16.1	16.0	16.4	16.8	13.6	14.0	14.0	14.3	14.7
12H	15.7	16.1	16.1	16.5	16.9	13.5	13.9	13.9	14.3	14.7
8H 4H	15.3	15.7	15.7	16.1	16.4	13.7	14.1	14.0	14.4	14.8
6H	15.6	16.0	16.1	16.4	16.8	13.8	14.1	14.2	14.5	14.9
8H	15.7	16.1	16.2	16.5	16.9	13.7	14.1	14.2	14.5	14.9
12H	15.8	16.1	16.3	16.6	17.0	13.7	14.0	14.2	14.4	14.9
12H 4H	15.3	15.6	15.7	16.0	16.4	13.6	14.0	14.0	14.4	14.8
6H	15.6	15.9	16.0	16.3	16.8	13.7	14.1	14.2	14.5	14.9
8H	15.7	16.0	16.2	16.4	16.9	13.7	14.0	14.2	14.5	14.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.4 / - 0.5					+ 0.5 / - 0.7				
1.5H	+ 0.6 / - 0.4					+ 0.2 / - 0.5				
2.0H	+ 0.7 / - 0.8					+ 0.6 / - 0.9				

CIE Pub.117 Corrected 675.2 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	85	81	91	85	81	90	84	81	77
1.00	97	91	87	96	90	86	94	90	86	81
1.25	101	95	91	100	95	91	98	93	90	86
1.50	104	99	95	103	98	95	100	96	93	89
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	102	107	104	101	104	101	99	92
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	108	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

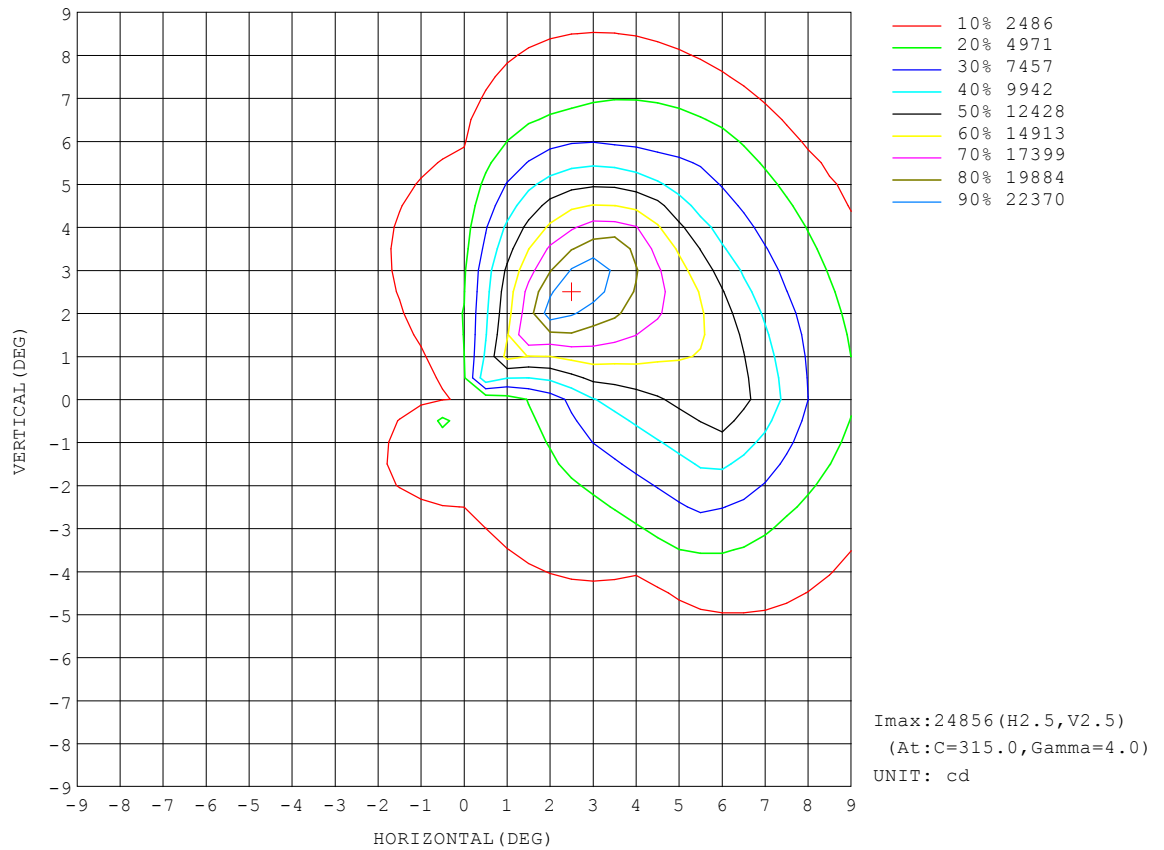


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

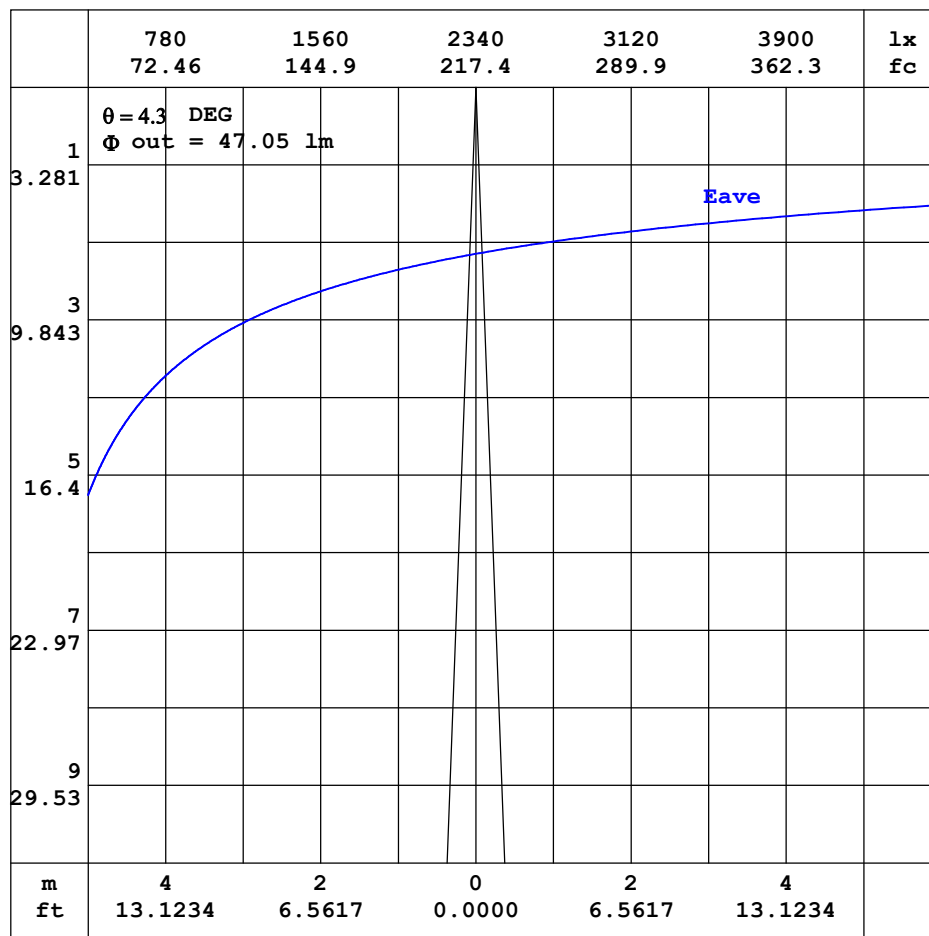


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:

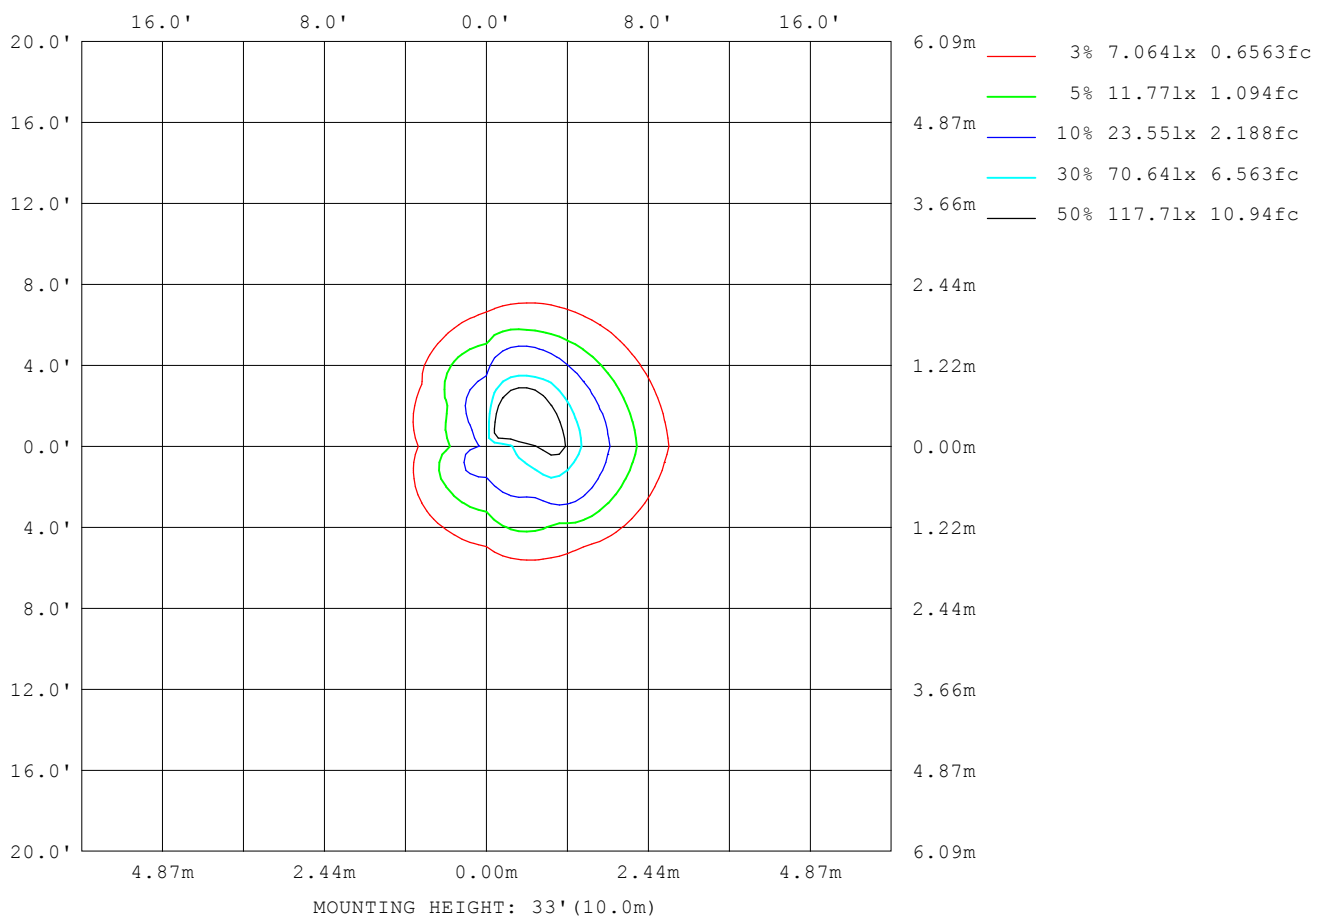

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm		
NAME: WL-3COVE1FT10WAD1UV-0707-GR	TYPE:3000K	WEIGHT:
SPEC.:	DIM.: 1FT	SERIAL No.:
MFR.: WS	SUR.:0.29*0.05	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2553
L_0~180 (75) av	1522
L_0~180 (85) av	992
L_90~270 (65) av	2303
L_90~270 (75) av	1353
L_90~270 (85) av	459
L_45 (65) av	2305
L_45 (75) av	1338
L_45 (85) av	660

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks:

Planar Illuminance Curve

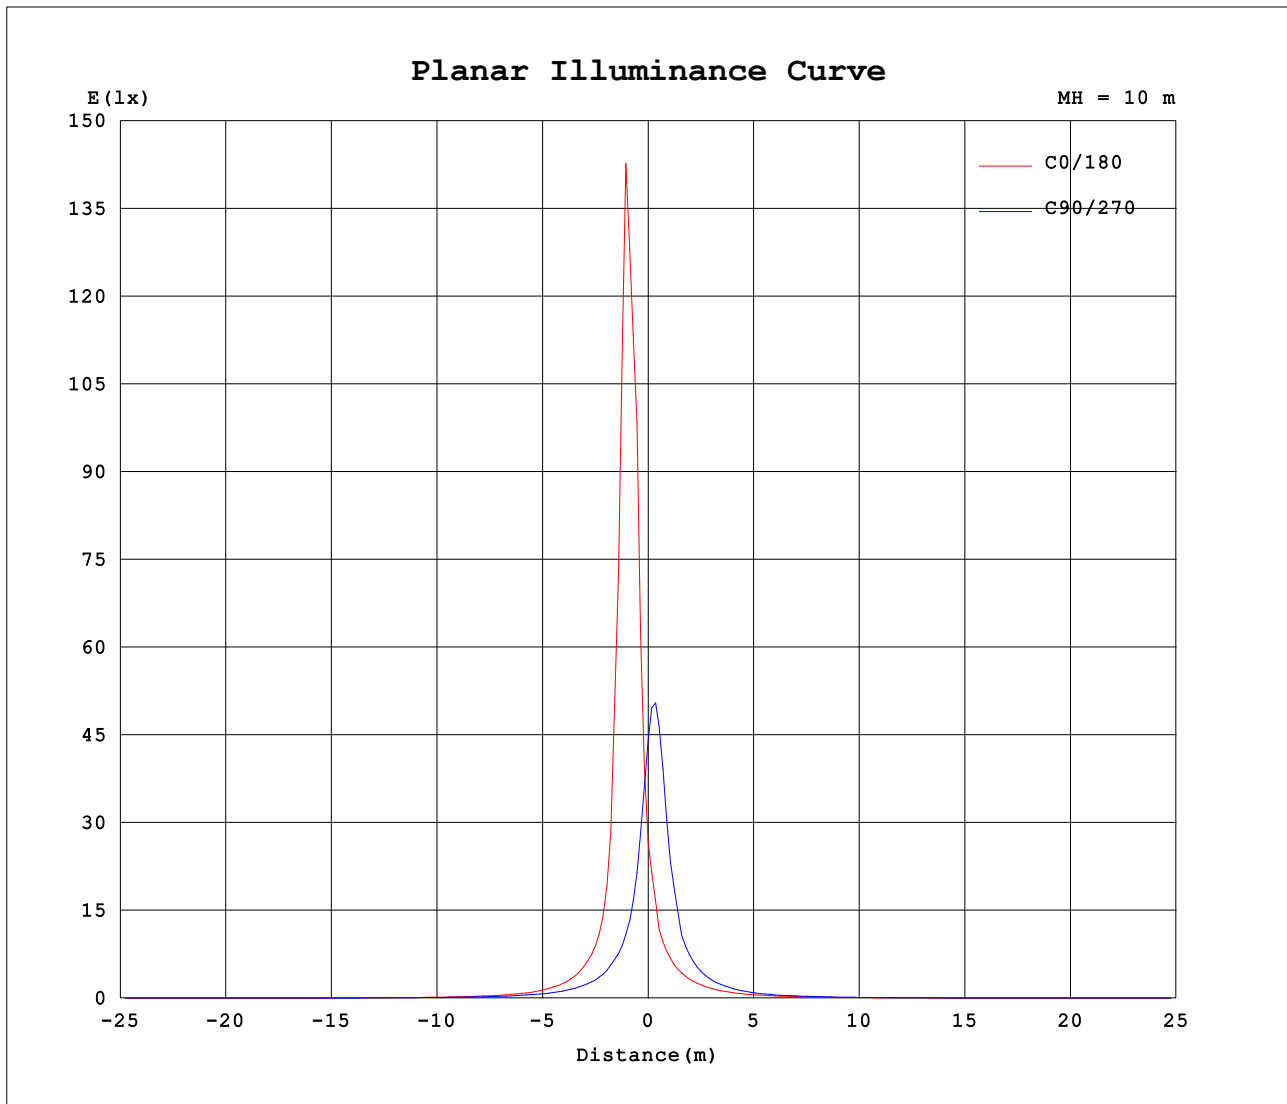

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity: 65.0%
Test Distance: 7.540m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.0870A P:10.40W PF:0.9940 Freq:60.00Hz Lamp Flux:675.17x1 lm								
NAME: WL-3COVE1FT10WAD1UV-0707-GR					TYPE:3000K			WEIGHT:
SPEC.:					DIM.: 1FT			SERIAL No.:
MFR.: WS					SUR.:0.29*0.05			Shielding Angle:

Table--1

UNIT: ×10cd

C (DEG) γ (DEG)	0	45	90	135	180	225	270	315										
0	264	296	442	774	264	296	442	774										
5	1296	291	134	114	82.1	110	313	2166										
10	298	101	59.9	49.2	39.7	50.5	94.3	199										
15	83.1	49.1	31.0	26.9	23.0	27.7	44.6	68.6										
20	40.3	27.3	18.6	16.2	14.1	16.8	25.4	33.1										
25	23.5	16.6	12.1	10.6	9.50	11.2	15.5	19.2										
30	14.2	10.9	8.52	7.59	7.01	7.96	10.3	12.2										
35	9.65	7.79	6.35	5.72	5.42	6.01	7.42	8.56										
40	7.12	5.88	4.95	4.44	4.30	4.68	5.64	6.29										
45	5.43	4.57	3.92	3.48	3.42	3.70	4.43	4.81										
50	4.30	3.60	3.11	2.76	2.73	2.95	3.53	3.75										
55	3.41	2.84	2.45	2.20	2.20	2.36	2.77	2.94										
60	2.70	2.25	1.88	1.61	1.57	1.80	2.18	2.34										
65	2.09	1.65	1.26	1.04	1.04	1.18	1.57	1.78										
70	1.40	1.05	0.79	0.64	0.60	0.74	0.98	1.13										
75	0.91	0.64	0.43	0.31	0.24	0.37	0.59	0.69										
80	0.50	0.31	0.17	0.12	0.11	0.13	0.27	0.35										
85	0.22	0.11	0.04	0.04	0.03	0.05	0.08	0.13										
90	0.08	0.03	0.00	0.01	0.01	0.01	0.00	0.05										
95	0.02	0.01	0.00	0.01	0.01	0.01	0.00	0.01										
100	0.02	0.01	0.00	0.01	0.01	0.01	0.00	0.01										
105	0.02	0.01	0.00	0.01	0.01	0.01	0.00	0.01										
110	0.02	0.01	0.00	0.01	0.01	0.01	0.00	0.01										
115	0.02	0.01	0.00	0.01	0.01	0.01	0.00	0.01										
120	0.02	0.02	0.00	0.02	0.02	0.01	0.00	0.01										
125	0.03	0.03	0.01	0.03	0.03	0.02	0.00	0.02										
130	0.04	0.03	0.01	0.03	0.03	0.02	0.00	0.03										
135	0.04	0.03	0.01	0.03	0.02	0.02	0.00	0.02										
140	0.04	0.03	0.01	0.03	0.03	0.02	0.01	0.02										
145	0.04	0.03	0.02	0.03	0.03	0.02	0.01	0.02										
150	0.04	0.04	0.03	0.06	0.05	0.03	0.01	0.03										
155	0.05	0.05	0.09	0.17	0.09	0.06	0.03	0.03										
160	0.08	0.11	0.18	0.31	0.10	0.09	0.06	0.07										
165	0.21	0.23	0.16	0.14	0.09	0.09	0.08	0.09										
170	0.25	0.15	0.09	0.10	0.08	0.08	0.08	0.10										
175	0.11	0.09	0.08	0.07	0.06	0.06	0.08	0.10										
180	0.09	0.07	0.06	0.08	0.09	0.07	0.06	0.07										

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.353
Humidity:65.0%
Test Distance:7.540m [K=1.0000]
Remarks: