

DRUM LINEAR LIGHT

- Opal or micro-prismatic diffuser options for different visual effects
- Selectable wattage and five-selectable CCT with 0–10V dimming
- Balanced uplight/downlight distribution for visual comfort

DRUM H2.95

Cable/StemPendant,Wall/Ceiling Mount

WISDOM LIGHT



APPLICATIONS


Ideal for offices, classrooms, retail spaces, conference rooms, and other commercial environments requiring uniform, low-glare lighting.

CONSTRUCTION

- Durable aluminum housing with a slim profile: 82mm height for Ø18" – Ø24", 100mm height for Ø36" – Ø48".
- High-performance LED with Opal diffuser
- Efficient heat dissipation for long lifespan and consistent performance
- Lightweight design for easy handling and installation

MOUNTING

- Pendant Mount
- Stem Pendant Mount
- Surface Mount
- Wall Mount



MODES & CONTROLS

- 3 selectable CCTs (3000K / 3500K / 4000K).
- 5-step selectable wattage per fixture size.
- 5-step up/down light distribution: 100/0, 70/30, 50/50, 30/70, 0/100


RATINGS & WARRANTY

Designed for indoor use; rated lifespan >100,000 hours (L90).
5-year limited product warranty.

HOUSING FINISHES



KEY FEATURES



SPECIFICATION

Model No.	Size	Wattage Select	Output Lumen	Nominal Efficacy	CCT Select	Up & Down Proportion	Input Voltage	Dimming	CRI
WL-25LSUD18IN35WGD1 HV(XXK-XXK-XXK)-YY-ZZ	1.5FT (D18"XH3.2")	12/18/22/28/35W	1380-4025 lm	115 lm/W	3000K- 3500K- 4000K- 3-CCT Select	70%+30% 50%+50% 30%+70% 10%+90% 0%+100% 5-Proportion Select	120-347V	0-10V (1-100%)	>80
WL-25LSUD24IN60WGD1 HV(XXK-XXK-XXK)-YY-ZZ	2FT (D24"XH3.2")	20/30/40/50/60W	2300-6900 lm						
WL-25LSUD36IN90WGD1 HV(XXK-XXK-XXK)-YY-ZZ	3FT (D36"XH3.9")	30/45/60/75/90W	3450-10350 lm						
WL-25LSUD48IN120WGD1 HV(XXK-XXK-XXK)-YY-ZZ	4FT (D48"XH3.9")	40/60/80/100/120W	4600-13800 lm						

DRUM H2.95

Cable/StemPendant,Wall/Ceiling Mount

WISDOM LIGHT



ORDERING INFORMATION

EXAMPLE: WL-25LSUD-18IN-35W-E5-D1-HV-(30K-35K-40K)-BK-SP

WL-25LSUD - 18IN - 35W - G - D1 - HV - (30K-35K-40K) - BK - SP

Installation Mode: SP=Suspended air craft cable
Finish: BK=Textured Black, WH=Textured White
CCT: (XXK-XXK-XXK)=30K-35K-40K 3-CCT Field Selectable
Voltage: HV=120-347V
Dimming: D1=0-10V
Series: G=3CCT Select, 5Watt Select, 5 Up&Down proportion
Wattage:
35W=12/18/22/28/34W 60W=20/30/40/50/60W
90W=30/45/60/75/90W 120W=40/60/80/100/120W
Diameter:
18IN=18INCH 24IN=24INCH 36IN=36INCH 48IN=48INCH
Brand&Product: Wisdom Light's DRUM H2.95

Brand & Product	Dimension	Wattage	Series	Dimming	Voltage	CCT	Finish	Installation Mode
WL-25LSUD= Wisdom Light's DRUM H2.95	18IN=18INCH	35W=12/18/22/28/35W	G= 3CCT Select, 5Watt Select, 5 Up&Down proportion	D1= 0-10V (1-100%)	HV= 120-347V	(XXK-XXK-XXK)= (30K-35K-40K)3- CCT Field Selectable	YY=	ZZ=
	24IN=24INCH	60W=20/30/40/50/60W					BK=Textured Black	SP=
	36IN=36INCH	90W=30/45/60/75/90W					WH=Textured White	Suspended
	48IN=48INCH	120W=40/60/80/100/120W					CS=Custom	air craft cable

Accessories



SCKD-1=
1-Point 5.91" Canopy



SCKD-2=
3-Point 5.91" Canopy



SCKD-3=
4-Point 5.91" Canopy



STE=
Aircraft Rope 7FT



6AC=600V,5-Core
6AC6=600V,6-Core
3AC=300VAC,5-Core
3AC6=300V,6-Core
6TAC=600V,5-Core

DRUM H2.95

Cable/StemPendant,Wall/Ceiling Mount

WISDOM LIGHT

Feature

UPLIGHT



Integrated uplight creates a soft halo on the ceiling or wall, available in all mounting types.

5 selectable up/down ratios:

100/0, 70/30, 50/50, 30/70, 0/100.

TOP COVER PLATE

- Removable top cover.
- For surface or wall mount, remove the over plate to expose the mounting ring and center opening.
- Uplight remains available in all mounting types.

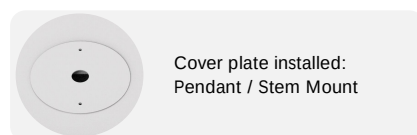

Surface Mount with uplight

DIE-CAST ALUMINUM HOUSING

Slim, durable aluminum body with efficient heat dissipation:


- 82 mm profile for Ø18" & Ø24"
- 100 mm profile for Ø36" & Ø48"

OPTICAL MIXING PLATE

- Optimized optics provide consistent light across the fixture.

OPAL DIFFUSER

- High-transmittance PC diffuser ensures uniform, glare - free illumination.
- Front-accessible design for Ø18" and Ø24", allowing diffuser removal from the front side
- Ø36" and Ø48" use a fixed structure; diffuser is not removable from the front.

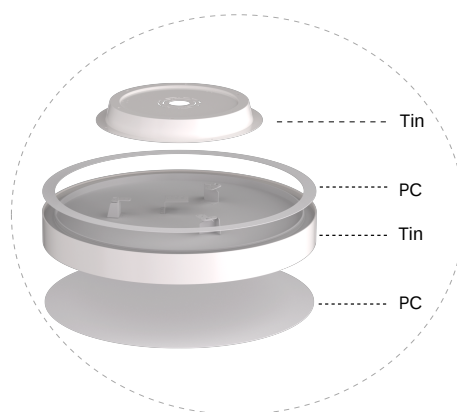


DRUM H2.95


Cable/StemPendant,Wall/Ceiling Mount



MOUNTING OPTIONS

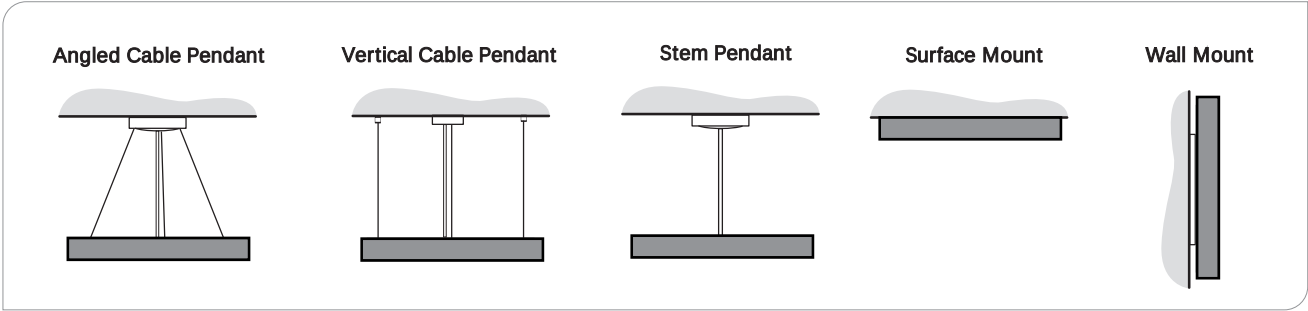

DIMENSIONS

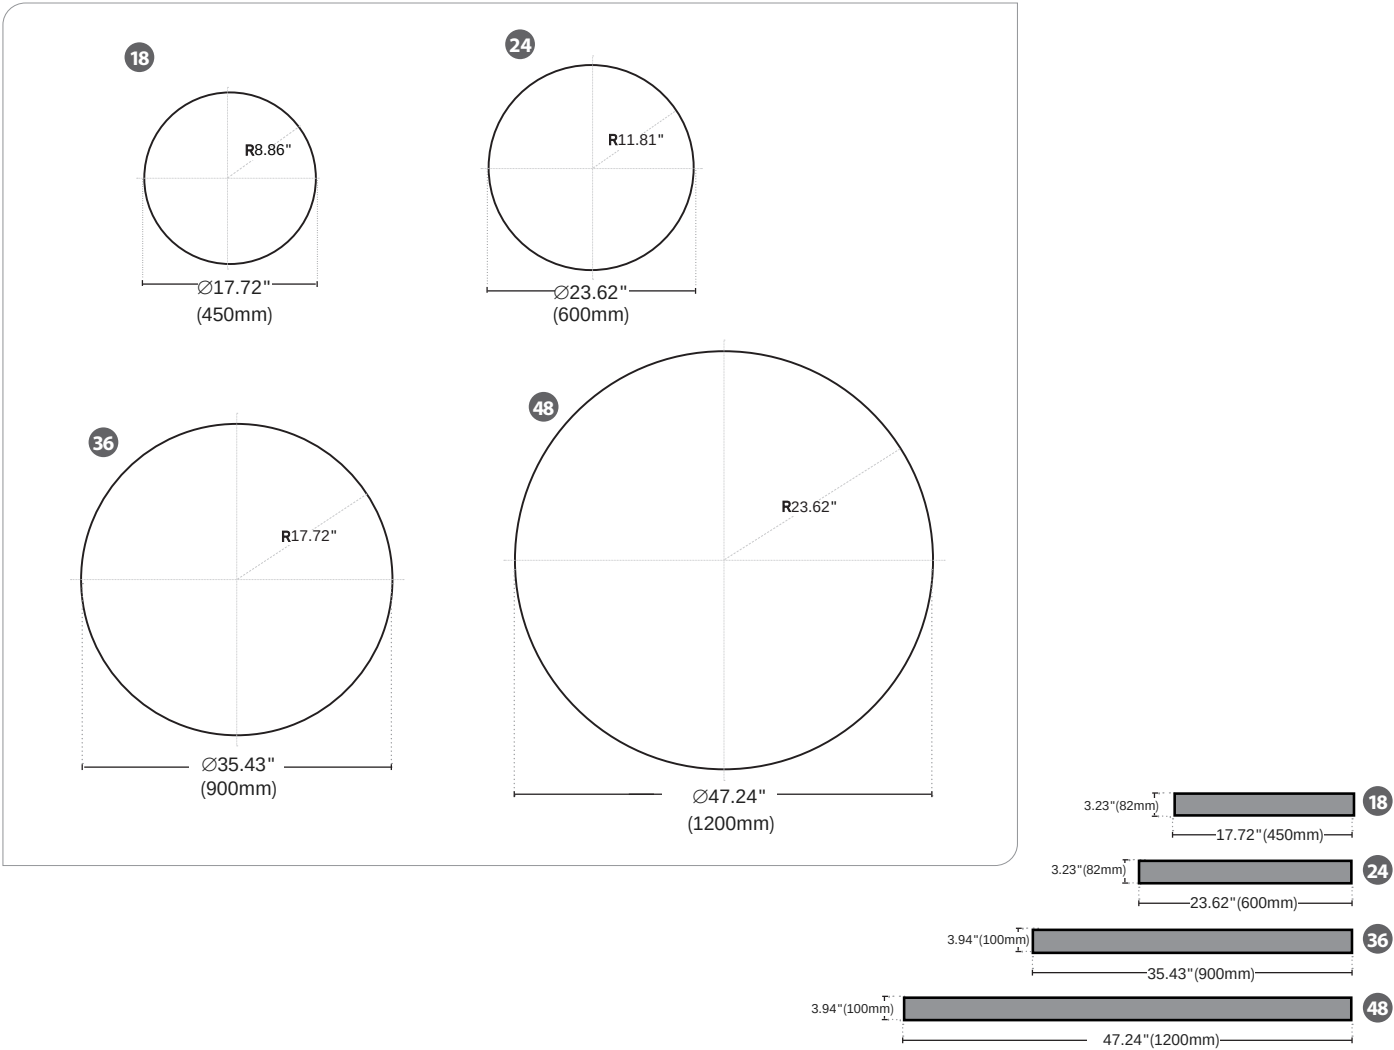


DRUM H2.95


Cable/StemPendant,Wall/Ceiling Mount



CANOPY MINIMUM MOUNTING HEIGHT

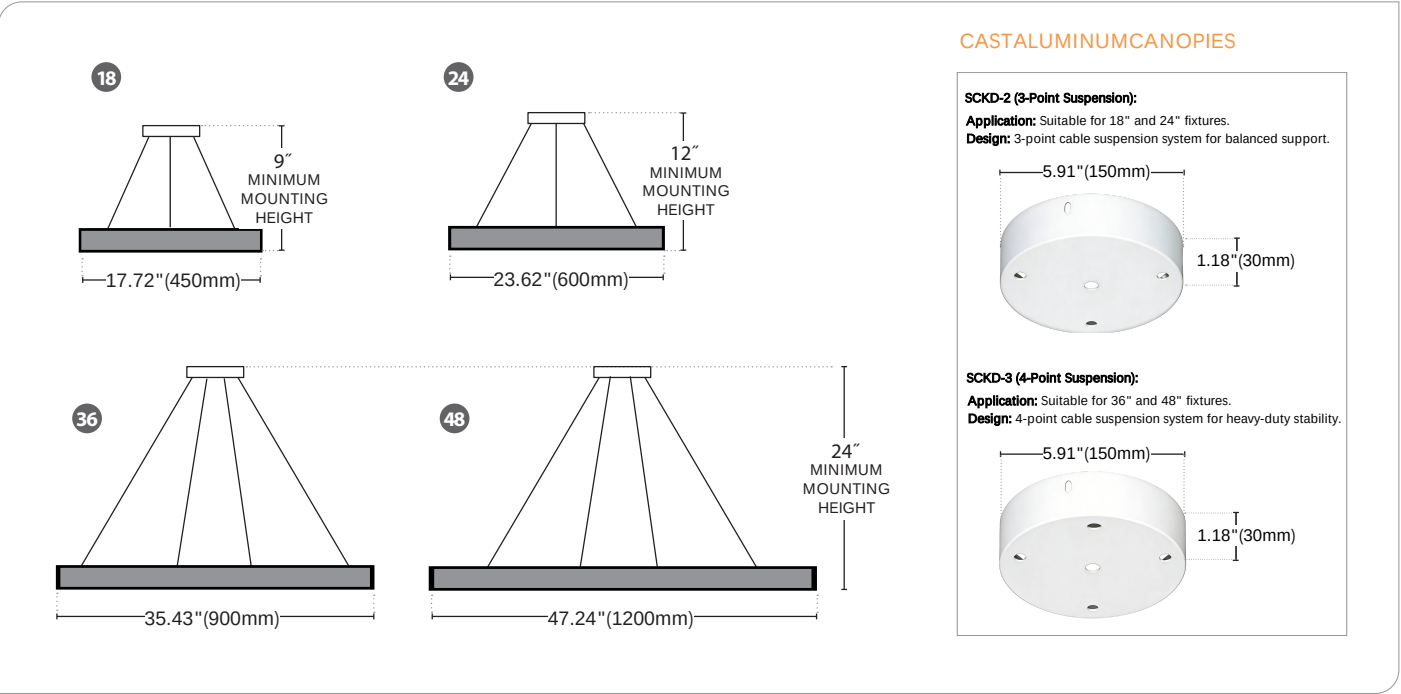

MINIMUM MOUNTING HEIGHT

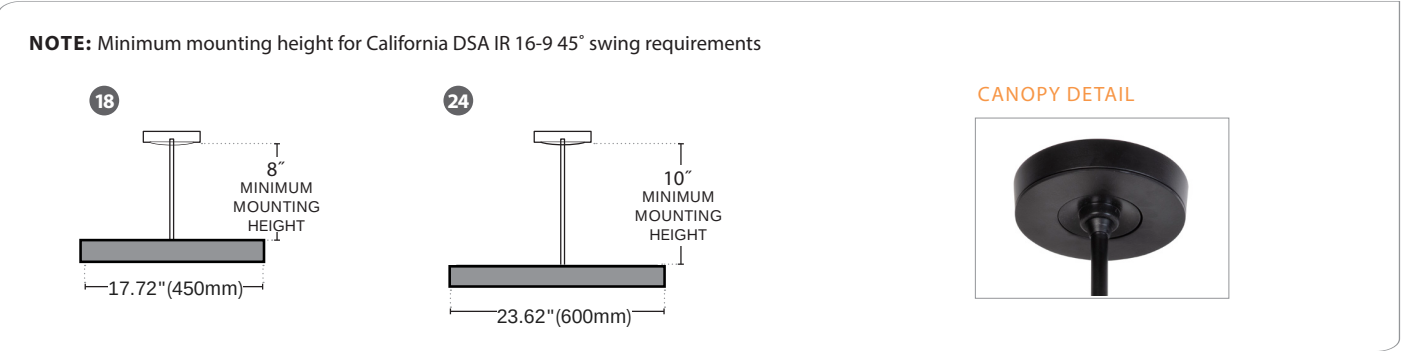

FINISH COLOR OPTIONS



DRUM H2.95

Cable/StemPendant,Wall/Ceiling Mount

EASY PENDANT INSTALLATION WITH SUCTION CANOPY


| This page helps customers understand suction canopy, pendant cable quantity, and stacking combinations for easy selection of accessories.

MOUNTING METHOD OVERVIEW

Straight Pendant Mounting

Best for: Even ceilings or regular layouts


- **Uniform alignment:**Lights hang perfectly vertical, ensuring a clean, organized ceiling appearance
- **Consistent illumination:**Provides even light distribution across the area
- **Simple installation:**Fewer adjustments needed, quick to align multiple fixtures

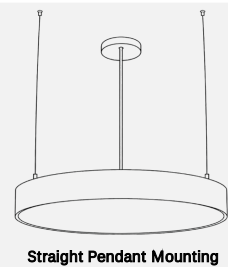


Tilted Pendant Mounting

Best for: Sloped ceilings, multi-level spaces, or design-focused layouts


- **Fits sloped ceilings :** Designed to follow ceiling slope or non-level layouts
- **Flexible layout design:** Enables creative lighting arrangements and accent lighting
- **Adds visual depth:**Breaks monotony, creates spatial layers and design interest

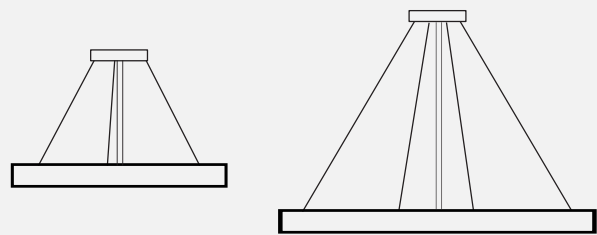


CANOPY SPECIFICATION & SELECTION TABLE



SCKD-1=1-Point 5.91"Canopy



SCKD-2=3-Point 5.91"Canopy



SCKD-3=4-Point 5.91"Canopy

Model Code	Canopy Type	Size (Ø × H)	Suspension Points	Fits Fixture Size
SCKD-1	Vertical Cable Pendant Canopy	D127 × H20 mm	1-Point Center Feed Canopy (with 2 Additional Ceiling Anchors)	18"/24"/36"/48"
SCKD-2	Angled Cable Pendant Canopy	D150 × H30 mm	3-Point	18"/24"
SCKD-3	Angled Cable Pendant Canopy	D150 × H30 mm	4-Point	36"/48"

